OSPREYFLOW

User Guide

OspreyFlow is an open-source intelligence mapping platform for crime analysis, anti-money-laundering, fraud detection, and event monitoring and alerting.

Version	1.43
Date	2026-11-10
Describes	OspreyFlow v0.5.0
Status	Issued

Document control

Version 1.43 · 2026-11-10 · For OspreyFlow v0.5.0 · Issued

Version	Date	What changed
1.43	2026-11-10	Describes v0.5.0. §7: the alerts journey, the rule editor included, built and no longer *coming*; the section is still to be rewritten for it.
1.42	2026-11-10	Rules' L2.10, case's L3.6 and L3.H1 as built, no longer *coming*. §4: a rule's alerts routed to one team, read by its members and the home case's Authors, given out or suppressed by its lead. §5.14: a drawn item's watch, the *Drawn items* alert when a load meets it, and the load result's count
1.41	2026-11-10	Admin's L2.7 as built. §3: Home's *What you can do, and what you answer for*, with *Why can I do this?*; *Needs you* in the top bar.
1.40	2026-11-10	Promotion as built (case lane's L3.4). §5.14: *Promote…*, its sheet and its checks, one load into the case's dataset, reviewed where the dataset asks; *Promotions from this board*; the board's Alerts panel and the canvas's alert badge. §7.1: the place's tabs as built, Connection strength in the Glass's rail. Still coming: Figures' Drawing panel (the Conduit does not count it yet).
1.39	2026-11-09	Brought up to the product as built (docs lane, D2a). §1: the four places. §3: Home, the place switcher and the context banner. §4: no branches; the new-case form; home cases, a dataset's Authors, teams; levels and roles in the words the Glass's help uses; views in the Cases drawer. §5: the rail, the view switch and More views; §5.2 *Save as a view*; §5.3 the basemap switch and *Find a place*; new §5.13 case views, §5.14 drawing boards, §5.15 your own link types. §9: the case's Figures tab, Dashboards on the rail, the Alert monitoring board, and the Reports Viewer's journey. §7 and the alerts it describes wait for the alerts journey (one queue, what raises alerts, watches, team routing, Raise an alert, the rule editor); its place is now Rules and Monitoring. Coming, and said so: promoting drawn items, *What you can do* on Home.
1.38	2026-11-05	Describes v0.4.12 (v0.4.11 was not released). No change to its content.
1.37	2026-11-05	Describes v0.4.11. No change to its content.
1.36	2026-11-05	The owner's rulings (build order step 33; ADR-112 Amendment 3): §2, when the sign-in page says your email already belongs to an OspreyFlow account, your administrator can join your organisation account to it, after which your organisation's sign-in takes you straight into that account.
1.35	2026-11-04	The owner's ruling (ADR-091 Amendment 1; build order step 30): §5.6, the Inspector shows no identifier meant for a machine — no node id, no link Type ID, and no internal reference such as a place's site reference; properties are named as you read them ("Prison number"); a link's end that is not on the canvas is named in words. Held rows name their source file by its file name.
1.34	2026-11-04	The owner's rulings (ADR-115 Amendment 5, ADR-050 Amendment 2, ADR-114 Amendment 33; build order step 28): §2, the organisation's sign-in button names the organisation's provider; what it means when the sign-in page says your email already belongs to an OspreyFlow account; staying signed in — a window renews its sign-in only while you are working in it, so one left alone asks you to sign in again when you come back, the page kept.
1.33	2026-11-04	Describes v0.4.10. No change to its content.
1.32	2026-11-04	Describes v0.4.9. No change to its content.

Version	Date	What changed
1.31	2026-11-04	The owner's ruling (ADR-132 Amendment 5): §4, under the GOV.UK theme the service's name is in the browser tab's title; the band under the GOV.UK header that named it is gone, giving the workspace its height back.
1.30	2026-11-04	Describes v0.4.8. No change to its content.
1.29	2026-11-04	Describes v0.4.7. No change to its content.
1.28	2026-11-04	§6: on a deployment whose own model has an NVIDIA GPU (ADR-135 Amendment 1), it answers much faster and is the larger qwen2.5:14b-instruct, as its "Answered by" line shows.
1.27	2026-11-04	Describes v0.4.6. No change to its content.
1.26	2026-11-04	Describes v0.4.5. No change to its content.
1.25	2026-11-03	Rehearsal fixes (build order step 18c). §5.2: **Show links among these** within a number of degrees says when the routes are already drawn; a node put back on the canvas brings back its links. §5.5: a search result chosen goes into the case before it is drawn, so a large draw you cancel leaves the node in the case. §5.4: **Cyclical** makes the timeline tall enough to read the grid; the grid draws correctly with cells chosen or the map open. §5.5: *Add many from a list* says how many different records were found ("37 found, naming 36 different records") and how many records are in the view after adding. §5.8: each route names its links, so two routes through the same people read apart. §5.6: a source file is named by its file name. A large expansion names relationships by their labels. §5.12: the strength legend is read again when you come back to the window. §9: the Figures' **Outcomes** has a column for every closing reason (True match, False positive, Duplicate, No further action, Referred) and one for closed with no outcome; an alert closed as Referred is no longer counted open. Ask the case names the person who asked at once.
1.24	2026-11-03	§2: staying signed in — a window renews its sign-in by itself, and when your session has ended it asks you to sign in again where you are, without losing the page.
1.23	2026-11-03	Rehearsal fixes (build order step 15). §5.12: the Matrix's Strength and Rarity fill in as each answer arrives, read *Working out…* meanwhile, and a refused rarity no longer blanks the strengths. §7.3: *Give to* offers people only, never a service account. §9.1: a pack says some items are *not shown* (you may not see something they rest on, or it has since been taken back, as a reverted load takes back its alerts), no longer "withheld from you"; a close reason that ends with a full stop is not given a second.
1.22	2026-11-02	Checked against the Glass end to end (build order step 10). §7.1: Monitoring's tabs include **Lists** and **Connection strength**, and say which levels see Held rows and Audit. §5.12: the legend marks the composition, not the rarity measure, as a case override (a case cannot choose the measure). §7.6: the *For* choices as the builder words them (*just me*).
1.21	2026-11-02	§5.12: shared-attribute rarity is now worked out by the client's own measure (one less a shared value's share of the pairs linked through values of its kind), with the earlier measure still to choose; the two compositions, standard and client parity, and the raw sum on the client's scale; an influencer triggered by a dataset; a case switched to client parity by its Author. §7.6: a strength figure on the client's scale.
1.20	2026-11-02	New §5.12, How connection strength is worked out: a link's strength from its own count and recency, the influencers that change it (direct links, and a boost from a record that evidences the link, such as an assault), shared-attribute rarity, the legend, the two new filters in Metrics, the Matrix's two sorts, the Inspector's explanation, who changes influencers, and why two analysts can see different rarity. §7.6: a rule on connection strength or rarity.

Version	Date	What changed
1.19	2026-11-02	§4: the demonstration cases each starter brings, and their domains; a public dataset's case.
1.18	2026-11-01	§7.5: a hotlist can hold an account number, matched on the account however its spaces are written. §7.4: a money-flow rule judges only movements between accounts its author may see. §7.10: the UK Sanctions List (FCDO) among the lists; the closed OFSI list says so.
1.17	2026-11-01	§7.3: closing an alert takes one of five closing reasons (True match, False positive, Duplicate, No further action, Referred) and words. §7.5 and the left rail: watches, and the alert inbox, are in Monitoring's Watches tab; the rail has no Watches entry. §7.10: UN and OpenSanctions are marked "licence not confirmed", and whoever manages lists sees only their own unit's counts. Ask to search answers on the engine you choose when the case's data may leave (the engine choice). The mark on the top bar is read aloud as "Osprey, go to Home".
1.16	2026-11-01	§7.11: a rule that runs on a schedule, every day or every week, and its runs. §7.12: a second person's approval — for a rule for the whole deployment, and for closing a high-severity alert; a rule's versions. §7.3 and §7.10 point to them, and a list may be refreshed on a schedule.
1.15	2026-11-01	§7.9: the four new AML templates (a high-risk jurisdiction, large cash, a dormant account reactivated, a sudden rise in velocity). §7.10: screening lists — the Lists tab, re-screening when a list changes, and a match confirmed by a person.
1.14	2026-11-01	§7.6–7.8: a rule written as a sentence, blank by blank from the ontology, and its drawn pattern; frequency and amount conditions; Preview on the last 90 days.
1.13	2026-11-01	§9.1–9.3: an alert in a report pack (open or closed, inferred or confirmed); alert trends in the Trends tab; the monitoring figures dashboards receive.
1.12	2026-11-01	§7 rewritten as Monitoring and alerts: the Monitoring place and its one queue for every kind of alert; severity, who may see an alert, giving it to a member, and closing it with a reason; the typologies as rule templates; whom a hotlist's alerts reach. §12: the canvas says the node the keyboard is on.
1.11	2026-11-01	§5.11: the Matrix, the graph as two tables a screen reader can walk, with its keys in §12.
1.10	2026-11-01	§6: an engine marked "under contract" or "no contract", and one the case's data may not reach shown not available, with the reason.
1.9	2026-11-01	§6: choosing the model engine in Ask the case and Ask to search, and what an answer's "Answered by" line means.
1.8	2026-11-01	The opening says what OspreyFlow is for: intelligence mapping, for crime analysis, anti-money-laundering, fraud detection, and event monitoring and alerting.
1.7	2026-10-29	Describes v0.4.1: the top bar wraps to a second line when its items do not fit, and the map keeps what it showed when the timeline opens.
1.6	2026-10-28	A source row is counted from 1 everywhere it is shown: the first row after the header is row 1.
1.5	2026-10-27	Add many from a list; Select what is lit and the weekday-by-hour cell brush on the timeline; the case brief; icons by value; a property condition on a pattern node; graph facts in an answer; Ask to search; a hotlist alert that explains itself; and sources withheld where a case does not read their data.
1.4	2026-10-18	§5.3: accounts where they are held, and payments as lines, on the map.
1.3	2026-10-18	§5.2: link types in the legend, left out of the view or brought back, and the custody links of a prison case.

Version	Date	What changed
1.2	2026-10-15	A cover page, contents, a list of figures, and this version history.
1.1	2026-10-14	Cases and their branches shown as one tree; a branch renamed or deleted where it is listed.
1.0	2026-10-14	First issue, with screenshots of the synthetic demonstration cases.

Contents

1. What OspreyFlow is 9
2. Signing in 10
3. Home 12
4. Cases 13
5. The Glass 15
   - 5.1 Where to start 15
   - 5.2 The graph 16
   - 5.3 The map 18
   - 5.4 The timeline 19
   - 5.5 Search 21
   - 5.6 The Inspector 22
   - 5.7 Metrics 23
   - 5.8 Find connections 24
   - 5.9 History 25
   - 5.10 The query builder 25
   - 5.11 The Matrix 26
   - 5.12 How connection strength is worked out 27
   - 5.13 Case views 29
   - 5.14 Drawing boards 29
   - 5.15 Your own link types 30
6. Questions to the model 31
7. Monitoring and alerts 32
   - 7.1 The Rules and Monitoring place 33
   - 7.2 Severity and who sees an alert 33
   - 7.3 Working an alert, and closing it 34
   - 7.4 Rules and templates 34
   - 7.5 Watches, and whom a hotlist's alerts reach 35
   - 7.6 A rule written as a sentence 36
   - 7.7 How often: frequency and amount conditions 37
   - 7.8 Preview on the last 90 days 37
   - 7.9 The AML templates: jurisdiction, cash, dormancy and velocity 38
   - 7.10 Screening lists, re-screened when they change 39
   - 7.11 A rule that runs on a schedule 40
   - 7.12 A second person's approval 41
8. Ownership and due diligence 42
9. Figures and dashboards 43
   - 9.1 Alerts in a report pack 45
   - 9.2 Alert trends 45
   - 9.3 The monitoring dashboard 46
10. Judgements 46
11. Export 46

12. Keys 47

List of figures

Figure 1 — The welcome page: sign in from here 10
Figure 2 — The sign-in page 11
Figure 3 — Home: the places your roles open, what needs your attention, and your recent cases 12
Figure 4 — A case with nothing drawn yet: Where to start 15
Figure 5 — The graph, with its groups shown 16
Figure 6 — The map, with sites, boundaries and hotspot cells 18
Figure 7 — The timeline: daily events across the case 19
Figure 8 — Cyclical: weekday against hour of day 20
Figure 9 — Search: suggestions after two characters 21
Figure 10 — The Inspector on a person: properties, relationships, shared contacts, risk and provenance 22
Figure 11 — Metrics: a ranking by betweenness 23
Figure 12 — Find connections: two people, and the routes between them 24
Figure 13 — History: each named step, with Restore 25
Figure 14 — Questions: ask about the documents in this case 31
Figure 15 — Rules and Monitoring: the alerts, with a hotlist alert open 33
Figure 16 — Watches: hotlists, monitors, and the alerts they raise 35
Figure 17 — A rule written as a sentence, its drawn pattern, and its preview on the last 90 days 36
Figure 18 — The Rules tab: the AML templates, and the form filled from "High-risk jurisdiction" 38
Figure 19 — The Lists tab: each list's version, entries, last update and state, the latest refreshes, and subscribing 39
Figure 20 — A rule written to run every day: its schedule, its runs, and the versions it has had 40
Figure 21 — A rule for the whole deployment waiting for a second person, and a high-severity alert whose close waits for approval 41
Figure 22 — Ownership: who stands behind an organisation, and its due diligence 42
Figure 23 — The case's Figures 43
Figure 24 — Dashboards: a board drawn inside the Glass 44
Figure 25 — A report pack holding an open alert, a trend over alerts and a closed alert 45
Figure 26 — Export: the subgraph on the canvas 46

OspreyFlow is an open-source intelligence mapping platform for crime analysis, anti-money-laundering, fraud detection, and event monitoring and alerting.

For analysts: the people who investigate in OspreyFlow. It covers signing in, the four places, cases and their views, the graph, the map, the timeline, drawing boards and the case's figures, monitoring and alerts, and how OspreyFlow decides what you can see. It describes what is built, and says plainly where something is not yet ("coming").

The other guides in this folder are the administration guide (administration-guide.pdf), for whoever installs and runs OspreyFlow, the developer guide (developer-guide.pdf), for data engineers, and the architecture guide (architecture-guide.pdf), for how it is built. The screenshots show the synthetic demonstration cases; no real data appears in them.

---

1. What OspreyFlow is

OspreyFlow holds a case's people, organisations, accounts, phones, places, documents and events as one graph, and gives you one workspace — the **Glass** — in which the network, the map, the timeline, the Matrix and the case's figures are views of the same working set. Selecting something on the graph selects it on the map; dimming a period on the timeline dims it everywhere.

OspreyFlow has **four places**, each with one job. You see only the places your roles open:

Place	Key	What it is for
The Glass	`G`	Investigate a case: search, expand, map, read its figures and its boards.
Ingest Studio	`I`	Bring data in: sources, pipelines, the domain model and held rows (developer guide).
Rules and Monitoring	`R`	Work the alerts that rules and watches raise, and see what raises them (section 7).
Admin	`A`	Run the deployment: people, roles, teams, datasets, models, maps and operations (administration guide).

Three things about the data run through everything below:

- **What you see is decided for you, and nothing hidden is hinted at.** Every record carries a classification and handling codes; you see what your clearance allows, in the cases you have been given. A record you cannot see is not drawn, not counted in a figure, and cannot be found by its links. The status bar says how many items were hidden by handling — never which. The same holds for where a record came from: a record's sources are named only when every dataset the record belongs to is one this case reads (section 5.6).
- **A model's findings are suggestions.** Anything a model produces is *inferred*, drawn dashed, until a person confirms it. Nothing is promoted automatically.
- **Records are never merged.** Records that seem to be one person or organisation are linked with a score, and shown as one at the strictness the case is set to. Change the strictness and they come apart again; nothing was overwritten.

2. Signing in

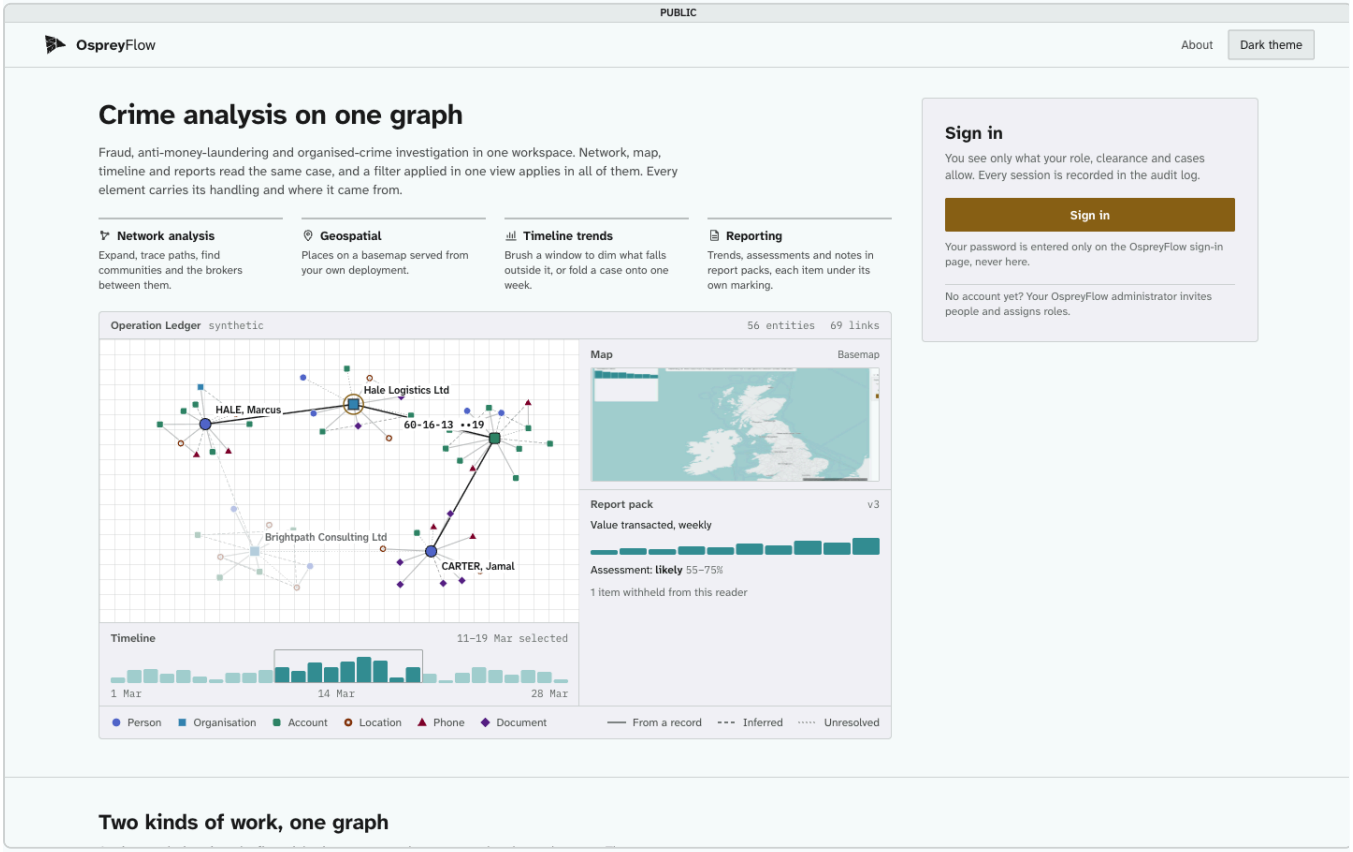


Figure 1. The welcome page: sign in from here

Open your deployment's address. The welcome page never asks for your password: **Sign in** takes you to the deployment's own sign-in page, at `id.` in front of the same address.

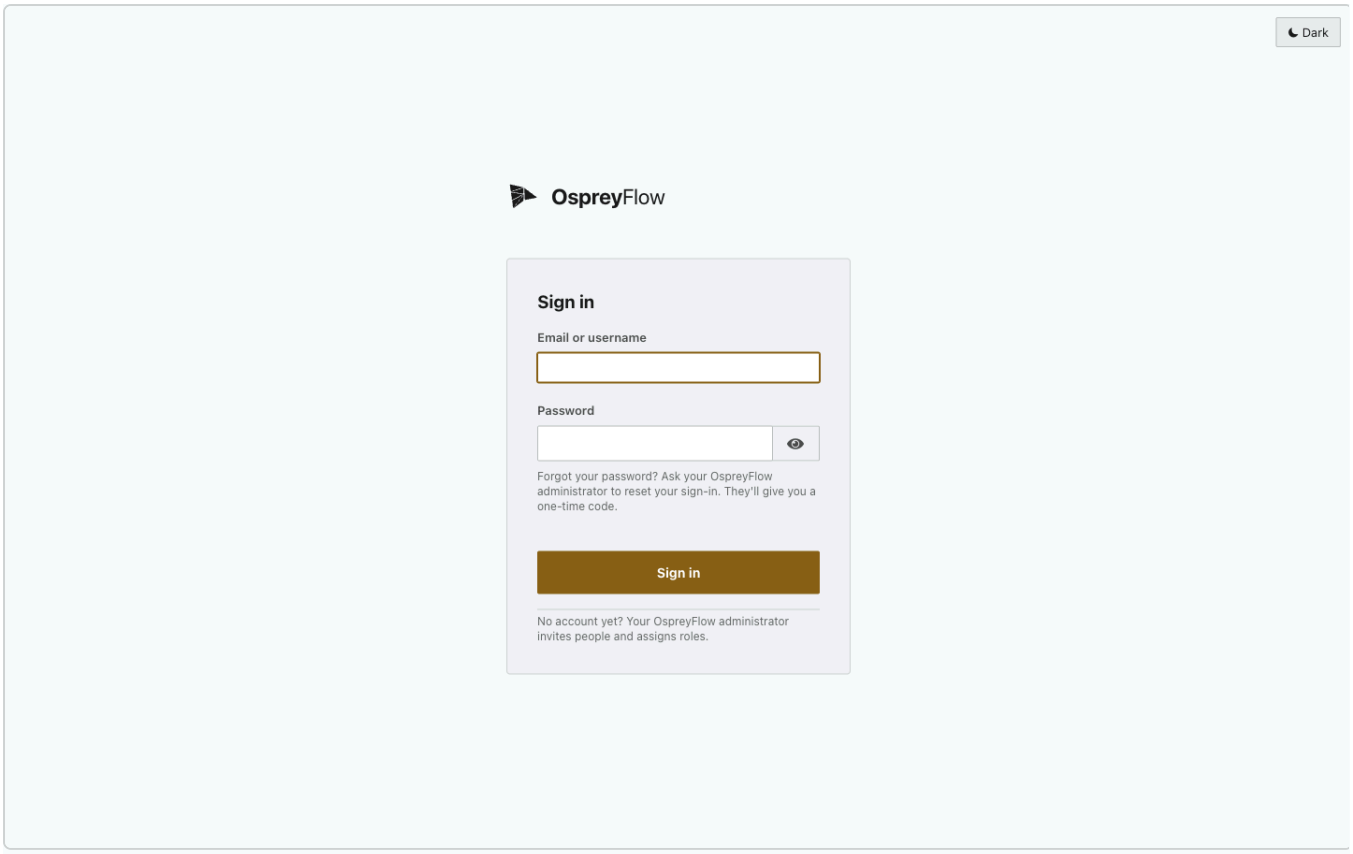


Figure 2. The sign-in page

Your administrator invites you. With email set up, you get a link to choose a password; otherwise they give you a **one-time code** in person, and you choose your password the first time you sign in. If you forget it, ask your administrator to reset your sign-in. Where your organisation's own sign-in is set up, the welcome page offers it first, by its name — for example **Continue with Example Department account** — and goes straight to your organisation's sign-in page. If that page comes back saying "This email address already belongs to an OspreyFlow account", your administrator has already made you an account with that address: sign in with it (**Sign in with an OspreyFlow account**), or ask them to join your organisation account to it — from then on your organisation's sign-in takes you straight into that account, with everything it holds.

Staying signed in: while you are working in a window — typing, clicking, scrolling — it renews its sign-in by itself, so it never stops you mid-task. A window left alone does not renew, so it does not keep your session alive for you: after a while away (about half an hour, as your administrator sets it) you are asked to sign in again when you come back, and the page stays as you left it. When your session has ended (you have been away, or your administrator has ended it), the window says **Your session has ended** over the page and offers **Sign in again**, which signs you in in a small window of its own: the page behind it, with the tab, the selection, the map and anything you have typed, stays as it is. If the sign-in service cannot be reached, it says so and offers **Try again**.

Signing out: the account button at the top right (your name and clearance) has **Sign out**.

3. Home

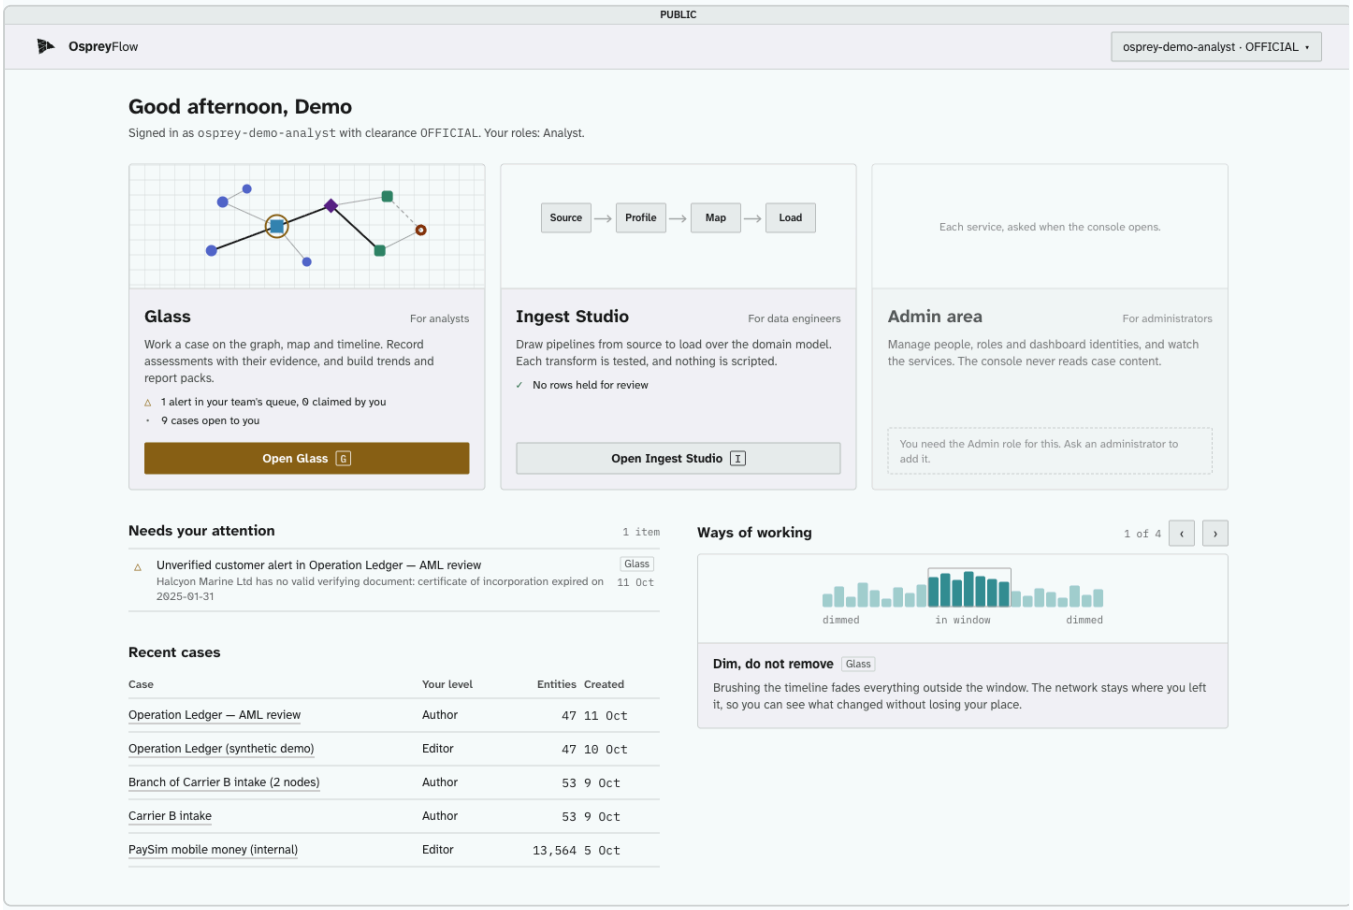


Figure 3. Home: the places your roles open, what needs your attention, and your recent cases

After signing in you arrive at **Home**. It greets you, says who you are signed in as, with your clearance and your roles, and then shows:

- **a card for each place your roles open**, each with **Open ‹place›** and its key (`G`, `I`, `R`, `A`). An analyst sees the Glass and Rules and Monitoring. With no place at all it says "Your account opens no place yet. Ask an administrator to give you a role.";
- **Needs your attention**: what is waiting for you, such as alerts on your cases ("Nothing needs you now." when there is none);
- **Recent cases**: up to six, with your level on each, how many entities each holds and when it was made;
- **Ways of working**: four short tips.

Below them, **What you can do, and what you answer for** is worked out for you: **Places you can open**; **What you answer for** (each case you are an Author of, the datasets whose promotions you review, and proposed link types waiting for you, each with a *Why:* line), or "Nothing waits for you."; **Your level in each case**; and, folded, **What you can do, by place**, where each right has **Why can I do this?** ("Given by your Analyst role.").

Needs you, in the top bar beside your account, appears when something waits for you: a promotion waiting past the days your administrator set (for one who may review it), and proposed link types to decide in a dataset you work on. Choosing one opens where it is decided, when your rights reach it. It is hidden when nothing waits.

The OspreyFlow mark at the top left always brings you back.

Moving between places. The **place switcher** in the top bar lists the same places; under the GOV.UK theme it sits inside the GOV.UK header. Under it, a **context banner** says where you are: in the Glass, "You are in the Glass · Case · Boards", with the case you are in and the dataset it reads; elsewhere "You are in the Ingest Studio", "You are in Rules and Monitoring" or "You are in Admin". If you can open both the Glass and the Ingest Studio, the banner offers **Open ‹dataset› in the Ingest Studio ↗**, and from there **← Back to case ‹name› in the Glass**, which brings you back to the same case and view.

4. Cases

Everything happens inside a **case**. Your level on a case decides what you may do there:

Level	What it means
Viewer	Reads the case. Changes nothing in it.
Editor	Works the case: adds, links, confirms and works its alerts, as their role allows.
Author	Answers for the case: gives levels, and may remove it. A dataset's Authors are its home case's Authors.

Whoever creates a case is its first Author. **A level never widens what you can see**: a record above your clearance stays hidden in a case you author. A case you have no level on does not appear at all. What you may do in a case is your level and your **roles** together:

Role	What it is for
Analyst	Investigates cases, works alerts and keeps watches. Reads figures and boards.
Data Engineer	Builds and runs pipelines, reviews promotions into a dataset and decides held rows.
Administrator	Looks after people, roles, teams, datasets and the deployment. Does not investigate by being one.
Reports Viewer	Reads a case's figures and the dashboards, and sees the alerts on cases they can read. Never works an alert.
Rule author	Writes the rules that raise alerts, and works the alerts in the queue.

Your administrator may also have given you a role of the deployment's own, or the **Super user** preset (Analyst, Data Engineer and Rule author together, still never the second person on your own work). The rail's **?** opens *Roles, teams and Authors*, which says the same in full: each place, role, right and level.

Starting a case. Create case asks you to name the case and choose what it reads: **Use an existing dataset...**, or **Make a new dataset — empty, loaded in the Ingest Studio**. You may tick the case's domain packs here too. A third way starts from **Boards**: a drawing as a case of its own (section 5.14). **Remove**, for a case's Author or an administrator, asks "Remove this case from every list? Nothing is deleted."

One dataset, and its home case. A case reads one **dataset**: search, paths, Explore and watches all stay within it. A record can belong to more than one dataset; you may see it through the one the case reads, but what it says of where it came from (its sources) is shown only when the case reads all of them (section 5.6). Every dataset also has one **home case**, named for it, which holds the dataset's own reports and its alerts that belong to no working case. A dataset's **Authors** are the Authors of its home case: they answer for the dataset. Owning is not acting: reviewing a promotion or accepting a type also needs that right.

Teams. A team is a set of people with a lead, made by an administrator. A dataset's Authors may be a team as well as people: its members answer for the dataset while they are in the team, and not after. A

rule's alerts can go to one team (**‹Team› only**, under the rule's *Alert goes to*): only its members, and the Authors of the dataset's home case, read them, and its lead, or their cover, gives each to a member (**Give to**) or sets it aside with **Suppress until...**. *Coming:* a case level given to a team.

The case menu at the top left lists your cases. The rail's **Cases** drawer lists them too, with **Who can open this case**, which the Author manages, and the case's **views** (section 5.13). A link to a case opens it directly.

The case brief. The **Cases** drawer also holds the case's **Brief**: what the case is for.

- **Priority information requirement** is one statement of the question that matters most.
- **Information requirements** are up to twenty, each of up to 2,000 characters, each marked **Open** or **Answered**. **Mark answered** and **Reopen** are done by a person; nothing else changes a status, and a model never does.
- **Attach...** links a requirement to what answers it: a **Trend**, a **Saved pattern**, an **Assessment** or a **Canvas view**, up to ten to a requirement. Choosing an attachment's name opens it where it lives: a canvas view opens as a case, a trend opens Figures on its Trends tab, and a pattern or assessment takes you to its panel. **Detach** removes the link only.
- Anyone who may read the case reads the brief. Only the case's **Author** edits it (**Edit the priority requirement**, **Add a requirement**, **Edit**, **Remove**). Ctrl/Cmd+Enter saves a box and Esc cancels it.
- An attachment you may not read is left out entirely: no title, no placeholder and no count. Two people with different access can therefore see different attachments under the same requirement.
- Editing the priority, a requirement's text or status, adding one or removing one puts a step, "Edited the brief", in **History**. That step cannot be restored, since a brief is not a canvas. Attaching and detaching are recorded, but do not appear in History.

The demonstration cases a deployment starts with. Your administrator may have installed OspreyFlow from a **starter** (a theme and a domain; administration guide §1a). Each starter brings the demonstration cases of its domain, all synthetic, each set to its domain's packs (so its reports and choices fit it). Every pack stays available to the cases you create.

Starter	The demonstration cases it brings	The cases' domain
`…-crime`	Prison Intelligence Dataset (synthetic demo); HMP fixture (synthetic demo)	NIEM
`…-aml`	Operation Ledger (synthetic demo), with its synthetic screening lists	FIBO
`…-fraud`	Fixture Corp (synthetic demo); PaySim only if your administrator downloads and adds it	FIBO
`…-cyber`	Cyber intrusion (synthetic demo): a STIX 2.1 threat case	STIX
`…-blank`	None, and no demonstration accounts	—

The theme (`ospreyflow-…` or `govuk-…`) changes only the look: under the GOV.UK theme, the browser tab's title names the service your administrator chose ("<service> – GOV.UK"), the same on every case. There is no band under the GOV.UK header naming it, so the workspace has the window's height. A dataset your administrator added from outside, such as a VAST Challenge dataset, is a case of its own named after the dataset, "(public dataset)".

5. The Glass

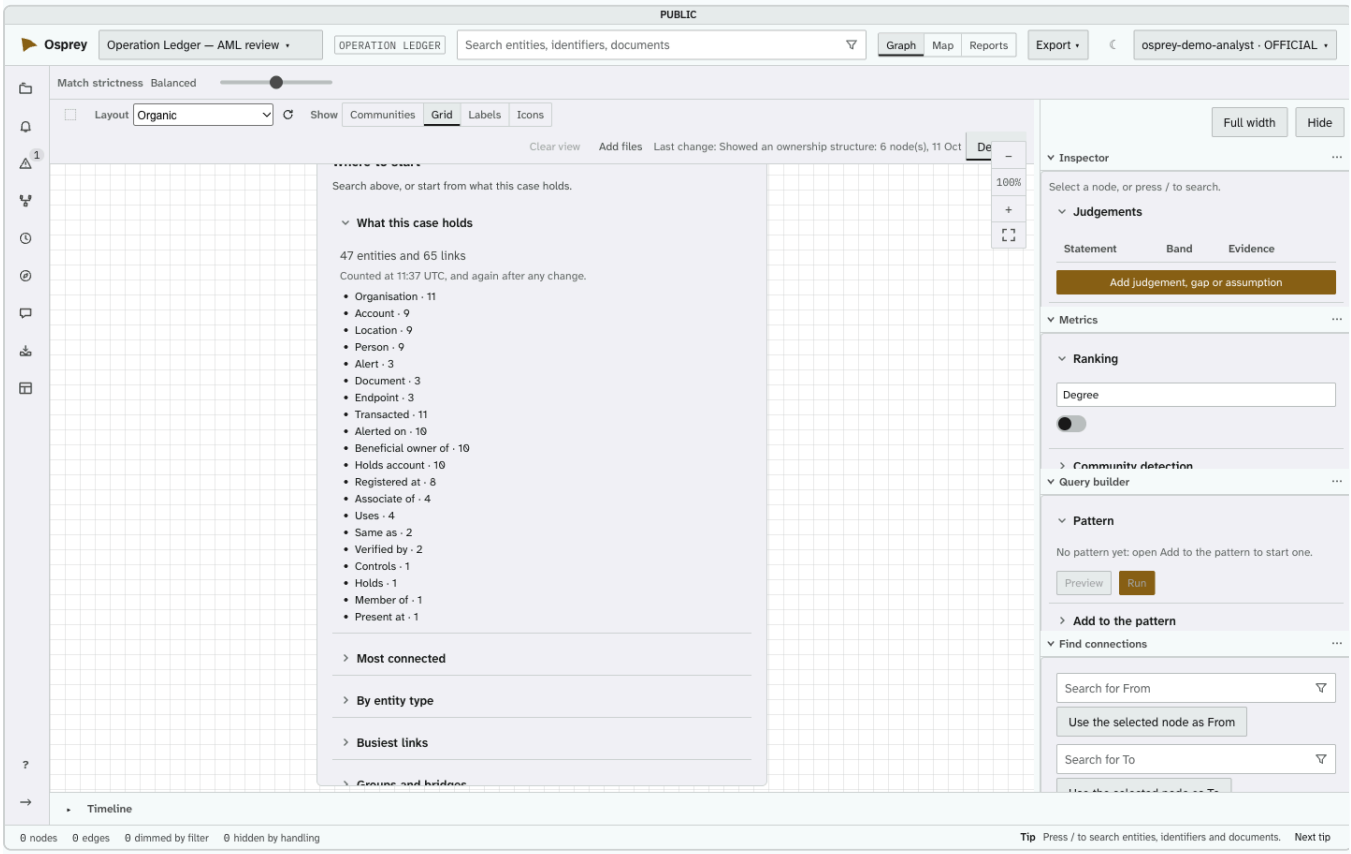


Figure 4. A case with nothing drawn yet: Where to start

Part	What it is
Top bar	The place switcher, the case menu, search, the view switch (Graph and Map, with Matrix and Figures under **More views**), Export, and your account
Context banner	Where you are: the Glass's **Case** and **Boards**, the case and the dataset it reads
Left rail	Cases, Ownership, History, Explore, Questions, Dashboards and Connection strength, those your rights allow (some under **⋯ More**), and Help (**?**)
Canvas	The graph, the map, the Matrix or the case's figures
Right column	The Inspector, Metrics, the query builder and Find connections, stacked; **Full width** and **Hide**
Timeline	Folded at the bottom until opened
Status bar	How many nodes and links are drawn, how many dimmed by a filter, and how many hidden by handling

5.1 Where to start

While the canvas is empty — or any time from the rail's **Explore** — **Where to start** shows what the case holds: counts of each type, the most connected entities, the busiest links and days, groups and the entities that bridge them, what is new since the last loads, and starter questions. **Add...** on any entity draws it alone, with its 25 or 50 busiest links, or with all of them. **Add many from a list** (section 5.5) is a fold here too.

5.2 The graph

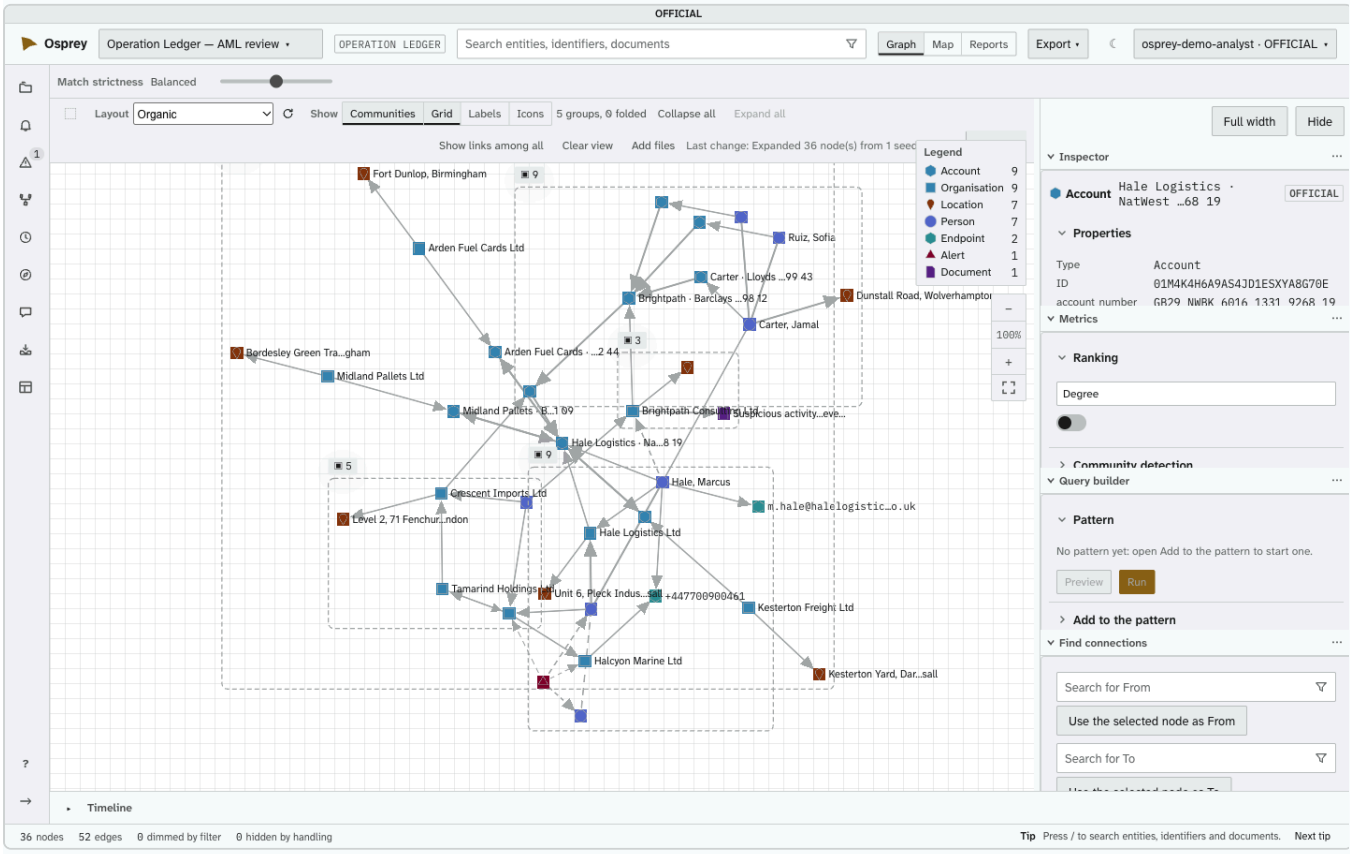


Figure 5. The graph, with its groups shown

Selecting. Click a node; Shift-, Ctrl- or Cmd-click adds or removes one; or draw a lasso. The selection bar then offers **Expand**, **Show links among these**, **Save as a view** (section 5.13), **Remove from view** and **Clear** (Esc). Past one degree, **Show links among these** draws the routes between the selected nodes, says which pairs are not connected, and says when the routes are already drawn. **Remove from view** and **Clear view** take nodes off the canvas; a node you put back brings its links in the view back with it.

Expanding. Double-click, or press Enter, to draw a node's links. Right-click (or `\`) opens its menu: **Show links** lists each kind of relationship with how many there are, so you can draw just one; **Actions** holds Link to..., Split from..., Find paths to..., Explain cluster, View messages, Expand group, Read full screen and Add files held by this.... An expansion that would add more than **500** nodes asks first, offering one relationship at a time, all of them, or nothing. An expansion past the working set's own limit is refused; reduce what is drawn, or save a smaller view, and try again.

Reading a link. A link's stroke says where it came from: **solid** from a record, **dashed** inferred by a model, **dotted** unresolved. Hovering names its type and how many such links join the two. Right-click a link (or `L`, then `\`) for its menu: its emails, events or messages; **Change link...**; its change history; a note; or hide it.

Link types. A link's colour says its type where the type has one. Under the types, the **legend** lists the links in view — each type in its colour, with how many — and each has a box: clear it to leave that type out of the view, tick it to bring it back (in this tab only; nothing is removed). **Show links** on a node draws one type at a time, so you can, for instance, follow only who shared a cell with whom. A prison or custody case (the Prison Intelligence Dataset demonstration case is one) carries the links a prison intelligence analyst works with: **shared a cell with** (with the cell and the dates), **co-defendant of**, **in**

conflict with (with a reason), **visited** (in person or by video), and a person's **role in** an incident (an assault, a disorder or a find, with what was found), beside the phones, calls, accounts and payments any case can hold. Two prisoners who call the same outside number, or are paid from the same account, are joined through that number or account on the graph, and the number's or account's calls and payments are on the timeline and the map.

Icons by value. A type's icon can depend on one of its properties. An **Endpoint** is drawn as a neutral device; one whose kind is a phone number is drawn as a phone, a PIN account as a keypad, and an account as an account. In a prison case an **Incident** is drawn as a parcel over a wall for a throw-over, a clash for an assault, a crowd for a disorder and a magnifier for a find; an incident of another category keeps the type's icon. Shape and colour stay the type's. The order is: the entity's own picture, then the icon you chose for the type (the **Icons** control in the canvas toolbar), then the icon for the value, then the type's icon. A node without the property, or with a value no icon is given for, is drawn with the type's icon. The **legend** lists **Icons by value** in view, each with its meaning, such as "Keypad: Endpoint, endpoint kind handle", and how many; the **Inspector** says "Icon for this value" for the selected node. Both name an icon only where the canvas draws it. As with every icon, the icon is drawn only when you are zoomed in to the neighbourhood, and past 10,000 nodes nodes are dots.

Same-as links. Records OspreyFlow thinks are one are joined by a same-as link. Its menu offers **Collapse into one node** (for this view only), **Confirm as the same**, **Mark as not the same** and **Explain this link**. Confirming or marking needs a reason, kept in the audit with your name. **Match strictness** at the top of the graph sets how sure a match must be to show records as one — Strict, Balanced (the default) or Broad — and says how many merged and split.

Groups. Communities boxes groups of closely linked entities; fold a group from its box, or press `G` on a node in it. **Layout** offers Organic, Force-directed tree, and Clustered bubbles; **Arrange** lays everything out afresh. Drag nodes to move them; their positions belong to your view.

Saving a view keeps the selection, and the links between it, as a view of this case (section 5.13); the case itself is unchanged.

5.3 The map

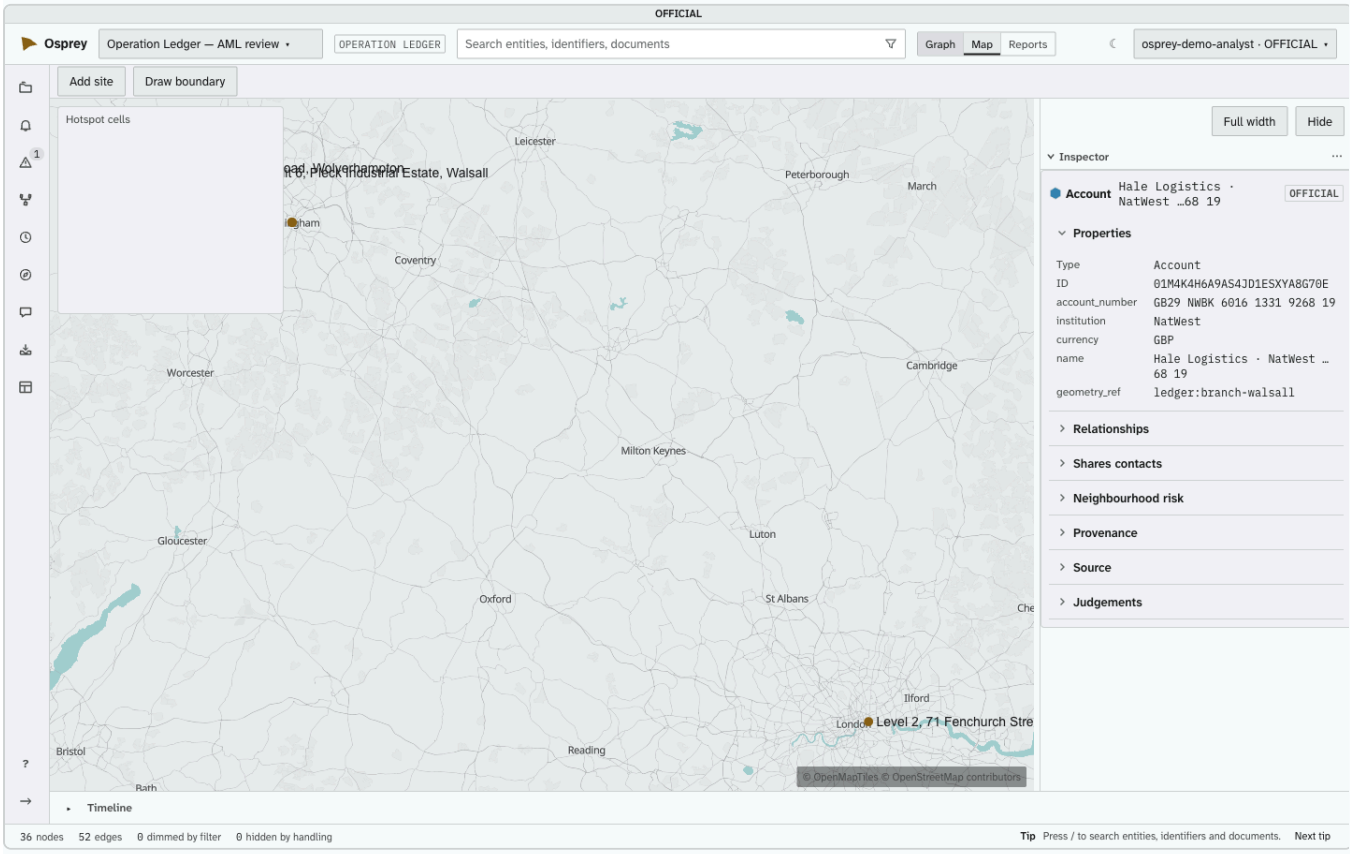


Figure 6. The map, with sites, boundaries and hotspot cells

The map shows the same working set and selection as the graph. A location is drawn at its point, and so is an account, where it is held; a link between two things on the map is drawn as a line — a payment from an outside account into a prisoner's private cash, for instance. **Add site** places a building's plan on the map from four matched points and draws a grid whose cells become locations. **Draw boundary** filters to what falls inside it. **Hotspot cells** counts what is in each cell, and filters as you choose. If the deployment's basemap is not built, the map says so.

Basemap. Where your administrator has made more than one map available, a **Basemap** switch chooses between them; a map served from outside the deployment is marked as a hosted provider.

Find a place. Type at least two letters of a place's name and press **Find**. It searches only the places in the gazetteer datasets this case reads ("Places come from the gazetteer datasets this case reads"), never an outside geocoder, and finds a place by its name alone. If none matches, it says "No place called … is in the gazetteer this case reads".

5.4 The timeline

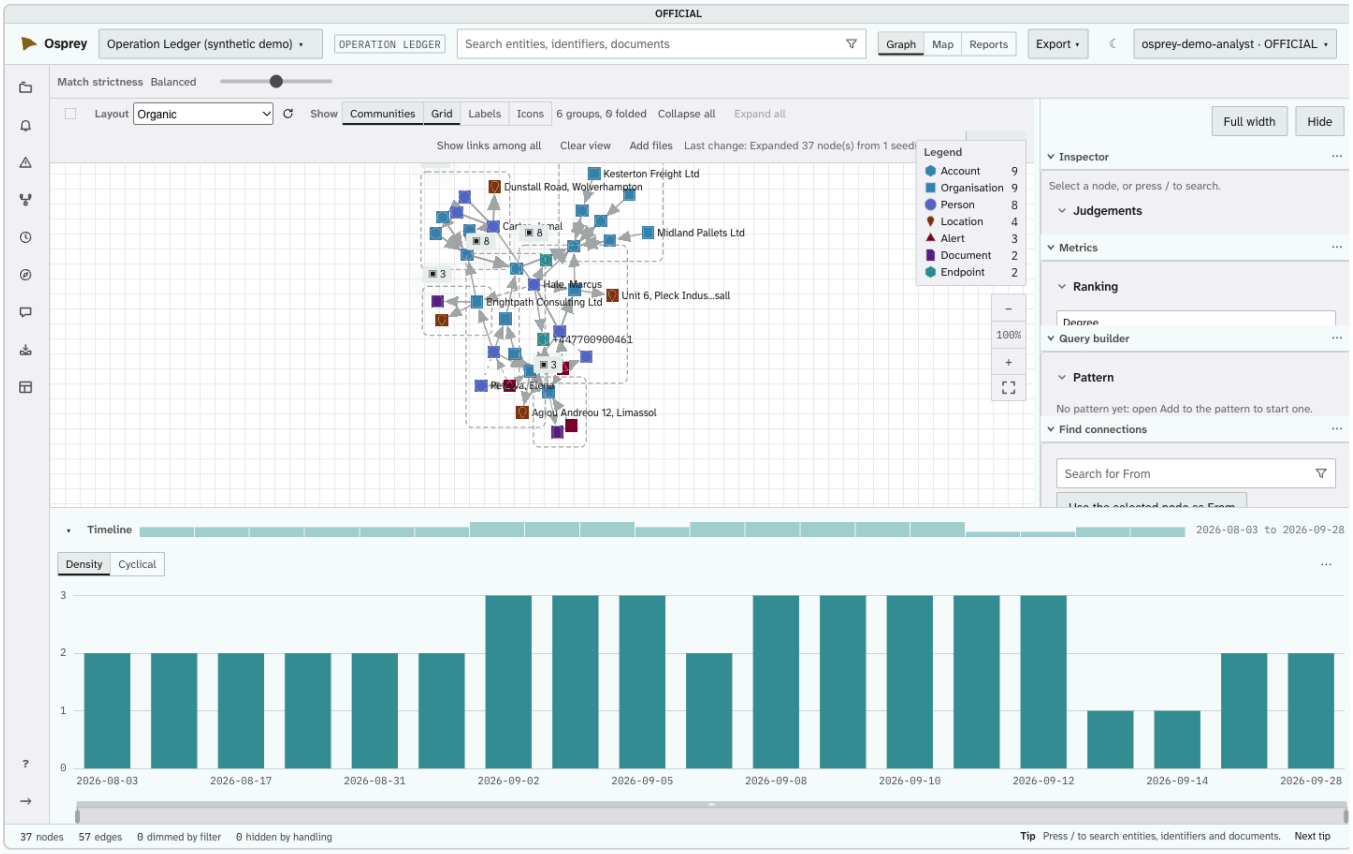


Figure 7. The timeline: daily events across the case

Open the timeline at the bottom. **Drag across the bars** to choose a period: everything outside it is **dimmed, never removed**, on the graph and the map alike. The slider under the axis zooms the axis without filtering. **Play** reveals the network as its events happen, at ½× to 8×. The ⋯ menu sets exact dates, or overlays another case. **Clear filter** removes the period.

Select what is lit. With a period chosen, **Select what is lit** replaces your selection with every node that has a link with at least one event in the period, its two ends included. A link is *lit* when it has such an event; a node is lit when a lit link touches it. **Undated links are never lit**: a link with no event has no date to fall in the period, and there is no setting to include it. The selection bar says so ("Lit in 5 Jan – 30 Apr 2026: undated links are not included") and offers **Undo select what is lit**, which gives back the selection you had; it is offered while the selection is still exactly the lit nodes. If nothing is lit, the selection is left alone and it says so. Dates are UTC. To reach it from the keyboard, set the period with **Set exact dates** in the ⋯ menu.

Save as a view, pressed with the lit nodes selected, keeps them as a view of the case (section 5.13).

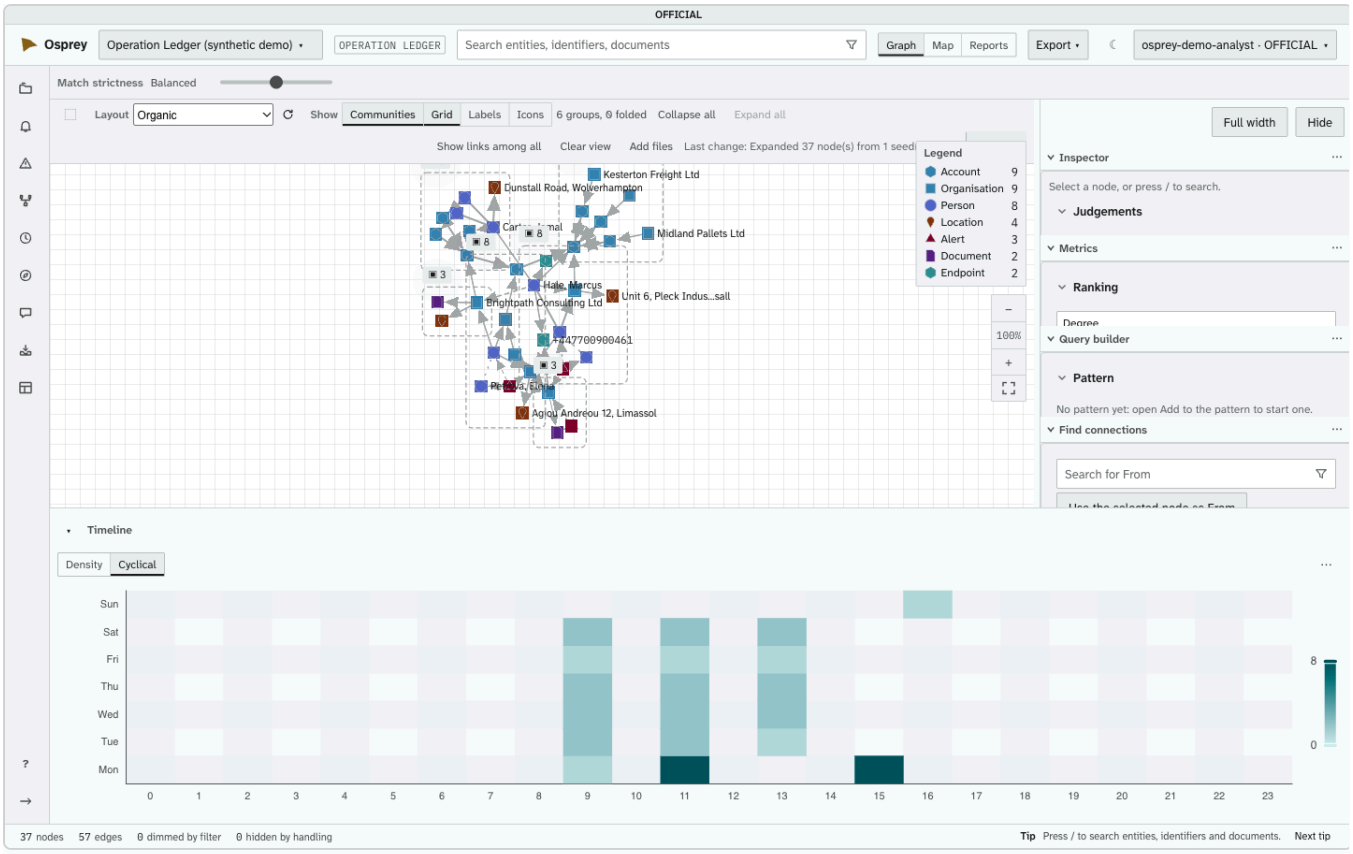


Figure 8. Cyclical: weekday against hour of day

Cyclical shows the same events as a grid of weekday against hour, for habits and routines. It always draws the case's whole range. Hours and days are UTC. Choosing it makes the timeline tall enough to read the grid's seven rows; a timeline you have made taller stays as it is.

Choosing cells. Drag across the grid to choose the cells (a weekday and an hour each) you want; they stay outlined and the rest of the grid stays visible. For the keyboard, open ⋯ (**More timeline options**) and **Choose cells (UTC)**: tick the days (Mon to Sun), set **From hour** and **To hour** (0 to 23), or press **Weekend**. A drag sets the hours too. **Clear** removes the choice, as does **Clear filter**. Once cells are chosen, the map and its hotspot cells count only the events that fall in them, the canvas dims what does not, and the status bar counts what is dimmed as for a period. **Select what is lit** honours them as well: it needs a period chosen on the density view, and lights only links with an event inside the period and the cells. Choosing cells alone, with no period, does not offer it.

5.5 Search

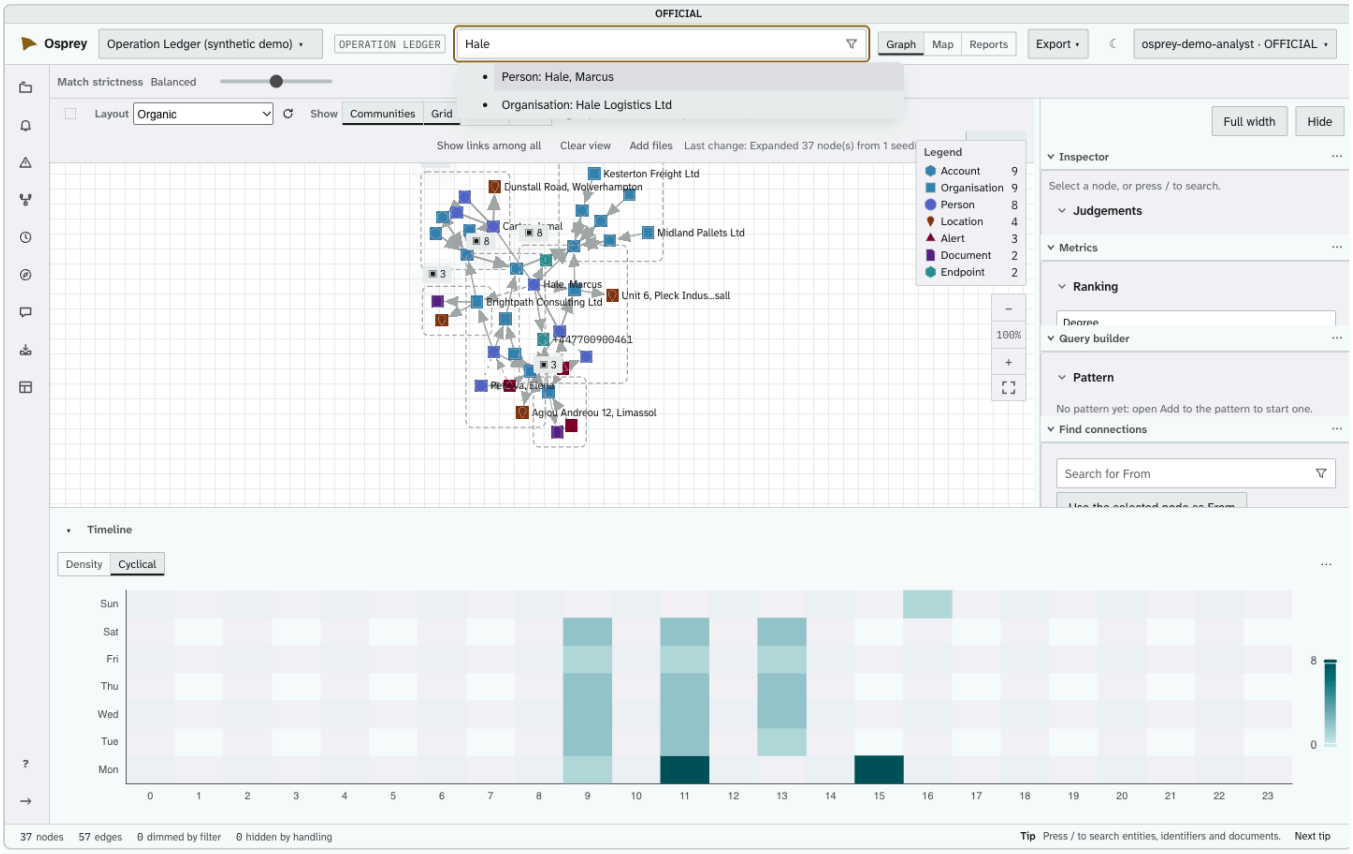


Figure 9. Search: suggestions after two characters

Press `/` anywhere (outside a text box) to search. Suggestions start at two characters, across names, identifiers and titles; choosing one puts it in the case and draws it with what is near it (three links out), counting first and asking if it is a lot. Cancelling a large draw leaves the chosen node in the case on its own. **Filters** narrow by entity type, how the text matches, and whether to look only at what is already drawn. A phone number or account reference is read the same way however you type it, so `07700 900640` finds the number held as `+447700900640`.

Add many from a list. The list button beside the search box (**Add many from a list**), and the fold of that name in **Where to start**, take a list of identifiers and draw what is found. Adding needs Editor on the case; without it, the box says so.

1. Paste identifiers into the box, or choose a `.txt` or `.csv` file (its first column; a first row that is a header such as "identifier" or "prison number" is left out). They may be prison numbers, National Insurance numbers, phone numbers or account references, one a line or separated by commas or spaces. A number written with spaces, such as `+44 7700 900640`, is one number.
2. Press **Count**. It says, for example, "40 identifiers read. 37 found, naming 36 different records. 3 matched nothing you can see. 1 repeated." Nothing is on the canvas yet. Changing the text clears the count, so a count is always of what you would add.
3. Press **Add** to put the nodes on the canvas without their links; **Show links among all** in the canvas toolbar's View group then draws the links. **Add with all links** draws the links among the nodes added and those already there instead. For a very large view it adds the nodes without looking for links, as Expand does. It then says how many records are in the view ("36 records are in the view"): each record once, one already on the canvas included. **Cancel** (or Esc) empties the box.

What the figures mean. *Found* counts every identifier that resolved, repeats included. *Matched nothing you can see* is one figure for an identifier that does not exist and one you may not see: the words, the counts and the work done are the same either way, so a list cannot be used to test whether a hidden person exists. *Repeated* counts identifiers that name what an earlier one did, so three spellings of one number count three times as found, twice as repeated, and as one record; when the records found are fewer than the identifiers found, the count says how many different records there are. If more records than the lookup reads share a value, it says so, "could not be told apart", rather than guessing. A number is matched only to a phone number and an account reference only to an account: a PIN holding the same digits is not a match.

The limit is **5,000** identifiers at once. More is refused, naming the figure, and nothing is added; split the list. A list that would take the canvas past its limit adds nothing, and says how many it would have been against the limit. The box is never shown an identifier back, only counts.

5.6 The Inspector

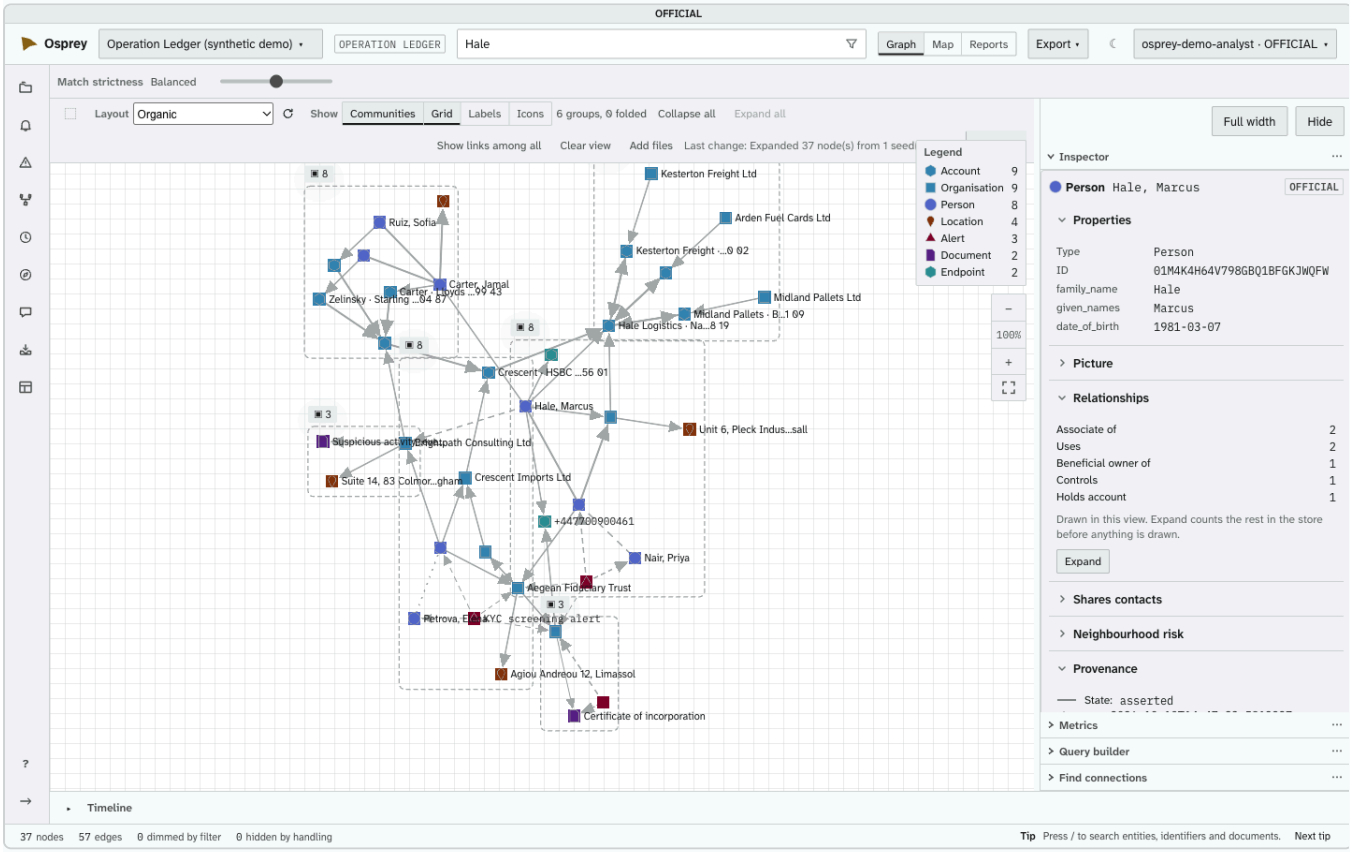


Figure 10. The Inspector on a person: properties, relationships, shared contacts, risk and provenance

Select one node and the Inspector shows its **properties**, its **picture**, its **relationships** (how many of each, drawn or not — **Expand** draws the rest), the entities it **shares contacts** with, its **neighbourhood risk** (alerts within two links over the last 90 days, scored on request and never stored), its **provenance** — from a record, inferred, or unresolved, and when it was first seen — its **source**, the file and row it came from (its file name, never the server's folder, and "row 3"), the **icon for this value** where the type has one (section 5.2), and the **judgements** that cite it. With several selected it summarises them and the links between them; with a link selected it shows the link's details, notes, events and history, and lets an Editor **change the link** (with a reason, and what stands behind it).

What you read, not what a machine stores. A property is named as you read it ("Prison number", not `prison_number`), and a link by its name ("Shared cell with"). The Inspector shows no node id and no link *Type ID*, and it leaves out references that mean something only to a store or to the system a record came from: a place's site reference, an organisation's or incident's internal reference, an email's message id, and where its picture or geometry is kept. They are still on the record, and search and the map still use them; they are only not shown. A link whose other end is not on the canvas names that end "an entity not in this view" rather than by its id.

Sources withheld. A record can belong to more than one dataset, and a case reads only some. Its sources are named only if the case reads every dataset the record belongs to. When it does not, where the sources would be listed, the Inspector's **Source**, a link's details and the messages view (**View messages**) say "Its sources are in data this case does not read". They never say "No sources recorded": there are some, and they are not this case's to see. The node or link itself is still shown, as you may see it; only where it came from is held back. The same applies in an alert (section 7.5). If an Author widens the case's datasets, records already on your canvas may keep saying this until you open the case afresh.

5.7 Metrics

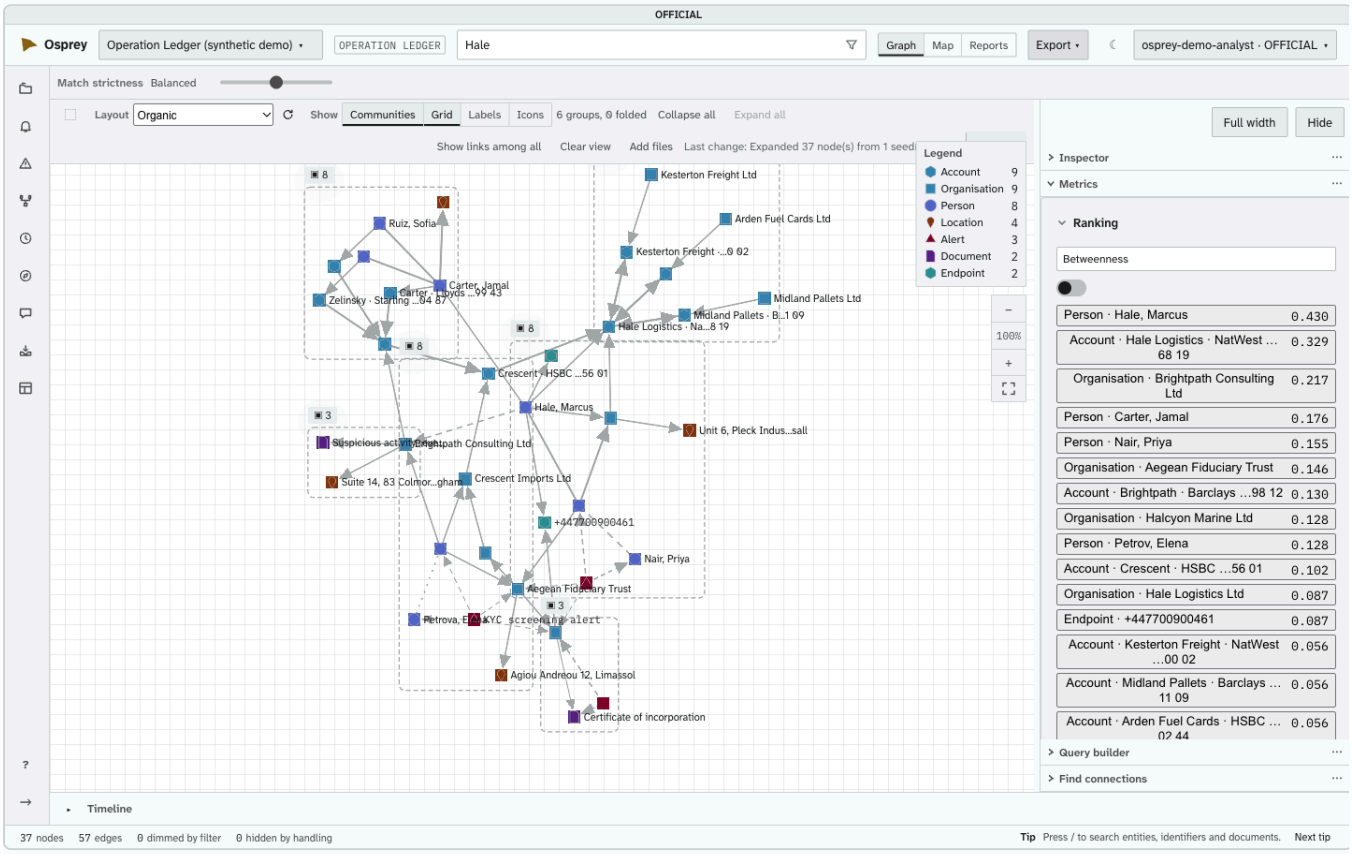


Figure 11. Metrics: a ranking by betweenness

Metrics ranks what is drawn by degree, weighted degree, betweenness, eigenvector, PageRank, clustering coefficient, the clique metric, connection strength or shared-attribute rarity (§5.12), and can compare two. Choose a row to go to it. Its filters — relationship strength, a metric's value — dim, never remove. A metric is shown as size, never as colour.

5.8 Find connections

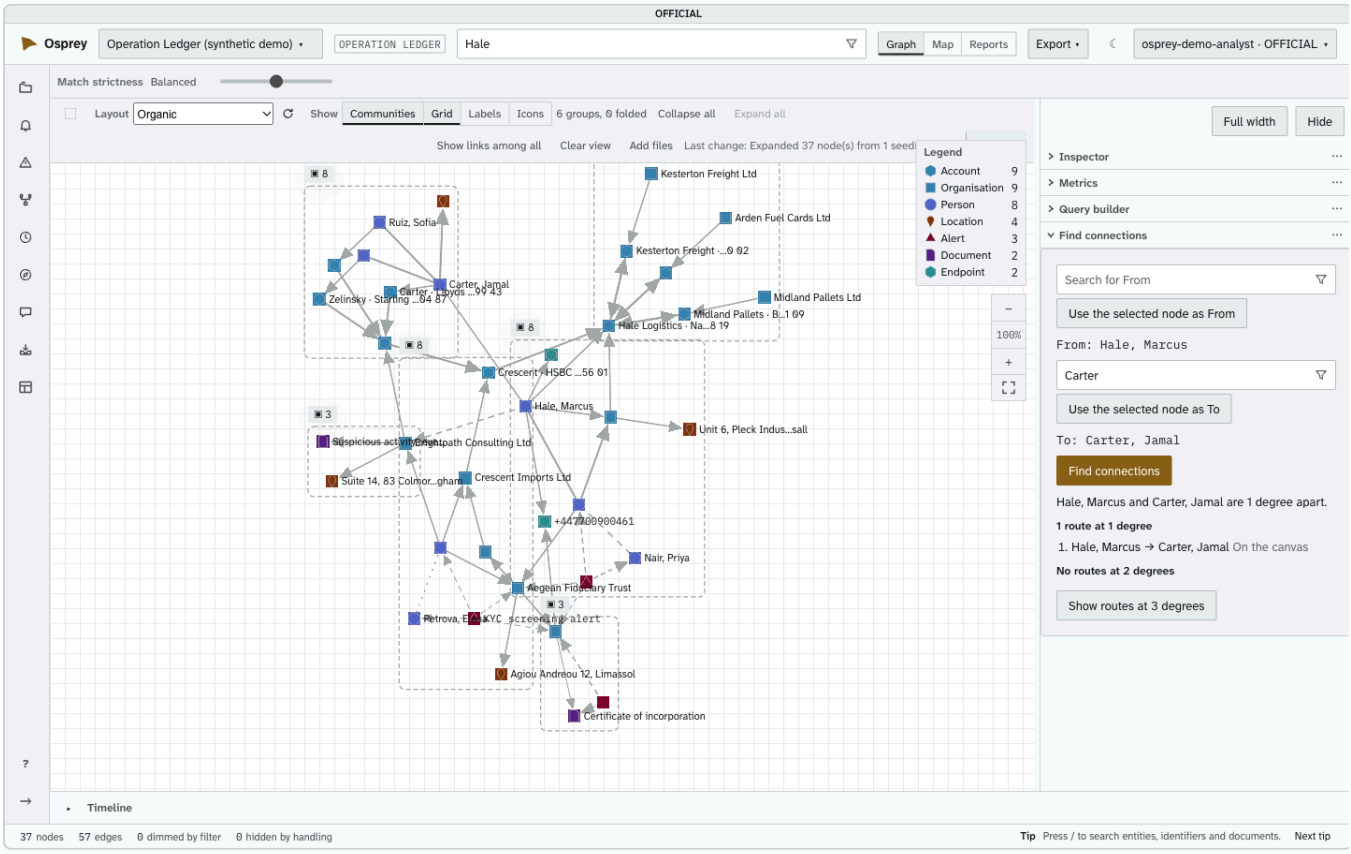


Figure 12. Find connections: two people, and the routes between them

Choose a **From** and a **To** — by search, or the node you have selected — and **Find connections** says how many degrees apart they are and lists the routes at that distance, then widens one degree at a time, up to eight. Each route names its people and its links ("Vance, Callum → Fairlop, Dominic → Skellion, Rory, by passes items to, then associate of"): two routes through the same people by different links are different routes. Any route can be drawn on the canvas, marking each node with its distance from From. **Find paths to…** in a node's menu gives the shortest paths between two selected nodes.

5.9 History

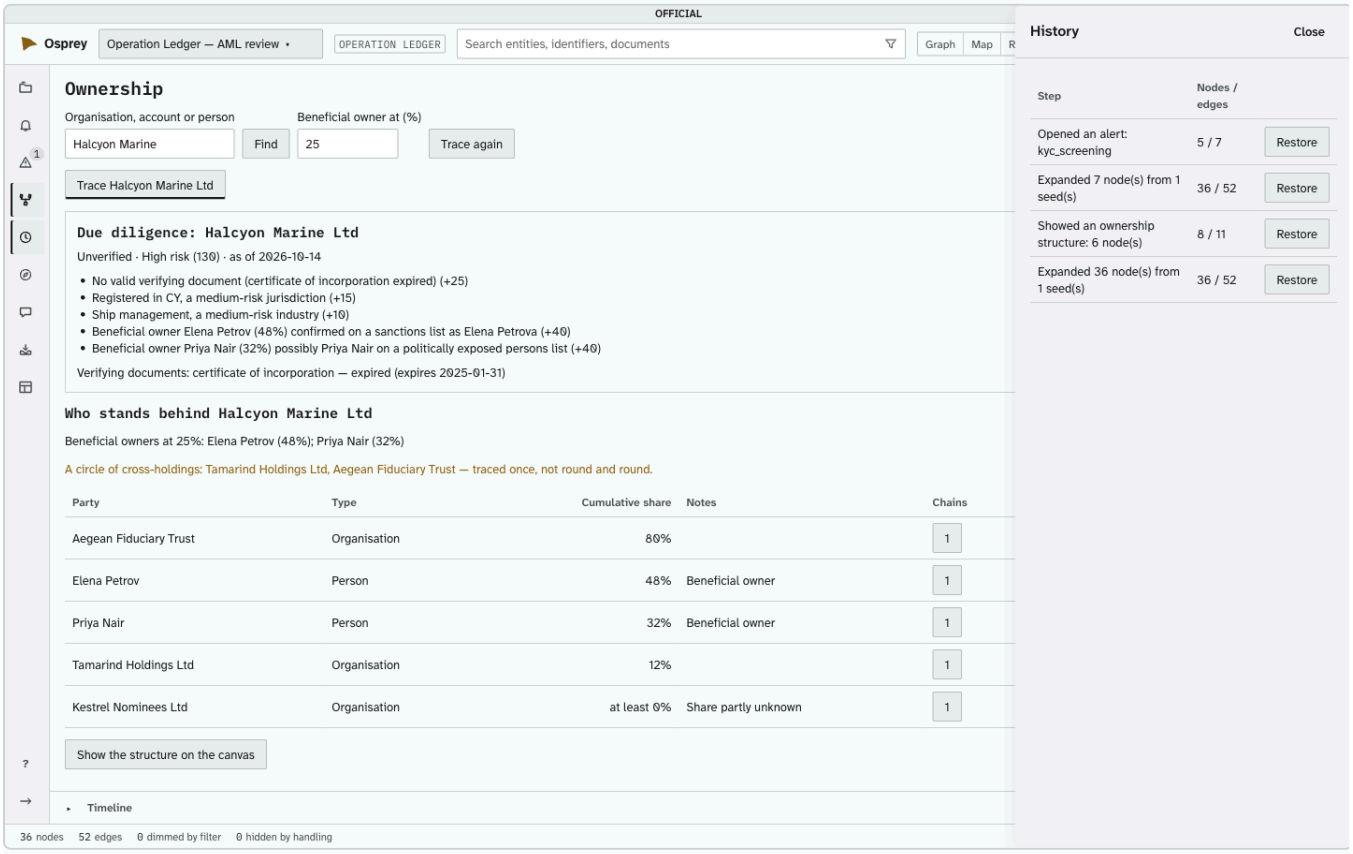


Figure 13. History: each named step, with Restore

History lists what you did to the view as named steps — "Expanded 36 nodes from 1 seed", "Opened an alert" — with how much each drew. **Restore** goes back to any of them. "Last change" on the canvas toolbar opens it too. An edit to the case's brief appears as "Edited the brief" and cannot be restored (section 4).

5.10 The query builder

The **query builder**, in the right column, draws a pattern of nodes and links, counts what matches (**Preview**, "~12 matches") and finds it (**Run**). Under **Add to the pattern** you add a node by type or pin one you have found, and connect two. Under **Save this pattern** and **Load a saved pattern** you keep and reuse them.

A condition on a node. A node can be narrowed by what one of its properties says. On a node, choose a property, type a value and press **Add condition**: "people held at an establishment whose `niu_area` is North Wing" is two nodes, one link and one condition. Each condition is listed, as `niu_area = North Wing`, with **Remove**.

- It is an equality: the property equals the value you typed. There is no "not", no range ("more than", "since"), no list of values and no "contains".
- A node takes up to three conditions, each on a different property; setting a property again replaces its value.
- Only text properties the case's data model marks as searchable are offered, and never a sensitive one. A pattern that names a sensitive or unsupported property, however it reached the server (a saved pattern, a model's proposal, a monitor), is refused with the property named, before anything is counted, and is never stored. A number, date or yes-or-no property is refused as not supported.

- The condition counts and runs inside what you may see, like the rest of the pattern: a hidden node that would have matched leaves no trace in the count.
- A saved pattern, a monitor and a rule built on it all carry the condition.

Ask to search. Above the pattern, **Ask to search** takes a question in words: "who shares a visitor with the principal?". Press Enter or **Ask**. The model is given only your question and the case's vocabulary: the entity types, the link types with their ends and direction, and the names of the searchable text properties. It is not given your data, and it cannot run anything. It proposes a pattern, which is drawn in the builder with a one-line explanation, a count, and the note "A model proposed this pattern. Check the pattern before you run it." Nothing runs until you press **Run**, and running changes nothing in the case. A proposal is a suggestion, not a finding.

- "The principal" or "the selected person" mean what you have selected, and only nodes you may see.
- A proposal is a new, unsaved pattern. **Save** never overwrites the pattern it replaced, and **Restore the previous pattern** brings that back. If you edit the pattern while the model is working, the proposal is dropped with a message, and you ask again.
- **"Could not express the question as a pattern."** The model's answer used a type, link, property or value the case does not have, or something the builder cannot draw. The builder cannot draw absence ("who has no phone") or ranges ("since 1 January", "more than five"). Rephrase the question, or draw the pattern yourself.
- A small local model will sometimes propose a wrong pattern. That is why the pattern and its count come first. It does worst on questions about a particular account, number or handset, since the kind of an endpoint is not something a pattern can match. For "more than one" questions, two nodes of one type are not forced to be different, so a count can include a node matched twice.
- Asking needs the right to ask the model, and Viewer on the case.

5.11 The Matrix

Matrix in the view switch shows the same working set as the graph, as two tables: **Entities** and **Links**. It is the way to work through the graph with a screen reader, or whenever a list reads better than a picture.

- **Entities** has a row for each node on the graph: its name, as the graph labels it; its type; its own marking; its provenance, in words, so a node a model proposed reads **Inferred** until someone confirms it; and how many links it has in view. **Links** has a row for each link: its type, the two ends, its marking and its provenance.
- The tables hold only what the graph holds. What you are not cleared to see is not in them, and they give no count of it. A node a filter dims stays in the table and says **Dimmed by filter**.
- Choose a column's heading to sort by it; choose it again to reverse. Each table's caption says how it is sorted and which rows are shown. A long table is shown a hundred rows at a time, with **Previous** and **Next**, and the caption says so: "Rows 101 to 200 of 12,481". Nothing is left out without saying so.
- The selection is the graph's. Select a row and the Inspector shows that node; go back to **Graph** and it is selected there. What you selected on the graph is selected in the Matrix, which opens on the page that holds it.
- **Expand** on a row opens the graph and expands that node there, with the same preview and limits as expanding it on the graph. **Show** opens the graph with that node selected and centred.
- The Matrix lists the whole working set. Groups folded on the graph, links hidden from the view and link types left out from the legend are shown in full.

From the keyboard, each table is one Tab stop. The arrow keys move between cells, Home and End to the start and end of a row, Page Down and Page Up between pages. Enter selects the row's node; Space adds it to the selection or takes it out.

5.12 How connection strength is worked out

How strong a link is drawn rests on three ideas. Each can be seen, filtered and explained on its own.

1. The link's own evidence. A link's stored weight comes from that link alone: how often it occurred, against what is heavy for its type (forty calls, twelve weeks in one cell, six payments), and how recently, halving every ninety days. A standing link (custody, family, co-defendants, group membership) has a fixed weight. No other link moves it, so nothing you cannot see changes it.

2. Influencers. An influencer changes how strong a kind of link is drawn when you look at it:

Part	What it says
What triggers it	A record that evidences the link: for example an Incident whose category is assault, disorder or find, at one end of the link or involving both people. Or **a dataset**: every link in that dataset (an assaults table, say), as the client's own code boosts a whole table. **Direct links** have no trigger.
Which links it changes	Named link types, such as *In conflict with* or *Role in*; or *a pair linked through a shared value* (two people who share a phone, say), which takes an added boost only.
The change	**Add** a boost (the usual), **multiply**, set a **floor** (at least this strong), or **exclude** (no stronger than its stored weight).
Its size, and a label	The label is what the legend shows.

OspreyFlow ships two. **Direct link**: calls, money transfers, visits and cell shares are drawn stronger than links that are only inferred or shared. **Evidenced by an assault, disorder or find**: a role in such an incident, and a conflict, association or cell share between people in one, are drawn stronger. Their sizes are calibrated so that a boost moves an ordinary link about as far as doubling its count would, and are marked "to be confirmed with the client". Boosts add up.

An influencer applies only if you may see the record that evidences the link, or, for a dataset, only if your case reads that dataset. An assault report above your clearance never thickens a line you can see, so it never tells you it exists; a dataset your case does not read is not named in your legend at all. The stored weight never changes: influencers are applied as the link is read, so a change takes effect at once.

3. Shared-attribute rarity. Two people who share something few others share are more interesting than two who share what everyone does. A thing two people of one kind share (a cell, a phone number, a visitor, a report, a group) is a **shared value**. By default rarity is worked out as the client works it out: a value held by *k* people links $k \times (k - 1) / 2$ pairs, and its rarity is one less its share of all the pairs linked through values of its kind. A phone two people share, among phones that link few pairs, scores near 1; the prison everyone is held in scores near 0. Two people take the rarity of the rarest value they share. Your installation may choose the earlier measure instead, **inverse frequency**, which adds, for each thing two people share, the logarithm of how many people there are over how many share it; the legend says which is in force. It is worked out per dataset unless you choose across the case's datasets, and **only over what you may see**: if two analysts have different access, they can see different rarity for the same pair, and both are right for what each may see. Rarity is its own measure, never folded into the strength, except under client parity (below).

Two compositions. How the three ideas make a strength is the installation's choice, shown in the legend:

Composition	Strength is	Drawn on
Standard (shipped)	the link's stored weight, from its own count and recency, with the influencers applied	0 to 1
Client parity	rarity plus the influencers' added boosts, with no count and no recency: the client's own sum	0 to 1, through a curve that keeps the sums' order; the Inspector also shows the **raw sum on the client's scale**

Under client parity, a stored link's rarity is that of the link itself among the links of its type you can see in its dataset (one less one over how many there are), and a pair linked through a shared value takes that value's rarity. Only added boosts count in the sum: a multiplier, floor or exclusion is left out, and the legend says so. Because rarity is worked out over what you may see, so is a client-parity strength. An installation chooses its composition in the same way as its influencers (a proposal and a second person's approval); a case's Author may switch one case to client parity, to compare the two on the same case, and back.

Where you see it:

- **The legend** lists, under *Connection strength*: the composition in force (marked **Case override** if the case chose it); the rarity measure, which only the installation chooses; every influencer in force in the case — what triggers it, the links it changes, the change and its size, and where it came from (shipped, installation-wide, or **Case override**); which link types count as direct; and the rarity note. It is read again whenever you come back to the window, so a change the case's Author made elsewhere shows when you return.
- **Metrics** (§5.7) offers *Connection strength* and *Shared-attribute rarity* to rank by and to filter by. Choose one under **Filter** and slide **Metric value at least**: a link below the strength, and a person none of whose links reach it, fade; with rarity, a person whose rarest pairing in view is below it fades. Nothing is removed.
- **The Matrix** (§5.11) gives each link its **Strength** and the **Rarity** of its two ends, and sorts by either. Each column fills in as soon as its answer arrives (the strengths in a second or two, the rarity of a large view's every pair can take longer) and reads **Working out...** until then. A link with no strength you can see reads **Not worked out**; two ends with nothing rare to share (of different kinds, or in no common dataset) read **None**. If the rarity is refused (a view with too many pairs) the strengths still show, and the line above the table says why.
- **The Inspector** explains a selected link under **Connection strength**: its count against what is heavy for its type, when it was last seen, the rule and weights version it was worked out under, each influencer that changed it and the kind of record (or the dataset) that evidenced it, and what its two ends share, rarest first, with the measure named. Under client parity it shows instead the link's rarity term, each boost added, and the **raw sum on the client's scale**, beside the strength it is drawn at. With two people selected, **What these two share** does the same for them.

Who changes influencers. An installation-wide set is proposed in the Glass's **Connection strength** (on the rail) by someone holding the right to manage influencers, and takes effect only when **another** person with that right approves it; the proposer can withdraw it but never approve it, and every version is kept; a version may also choose the composition and the rarity measure. A case's **Author** may add influencers for that case, switch off installation-wide ones in it, or choose its composition under *How strength is worked out in this case*; that needs no second person, because it changes only that case, and the legend marks it. Both are recorded in the audit.

Rules on strength. A rule written as a sentence (§7.6) may say "and the connection strength between it and … reaches X", or "… the shared-attribute rarity between it and another … reaches X". A strength

figure is on the drawn scale (0 to 1) or **on the client's scale** (the raw sum, which only client parity has: under the standard composition such a rule raises nothing). It is previewed like any other, and judged as its author, on what its author may see: it never raises an alert on evidence its author could not read.

5.13 Case views

A **view** is a saved lens on the case: what was drawn, its filters and its period. It is never a copy: there are no branches, and nothing in a view changes the case.

- **Saving.** Select what matters and choose **Save as a view** in the selection bar; name it under **View name** and **Save view**. A new view is yours alone.
- **Finding them.** The rail's **Cases** drawer lists them under **Views in this case**, each with **Open**, **Share with the case** and **Delete** ("Delete this view? Nothing on the case is deleted with it."). Only the person who saved a view shares or deletes it. Before you have any it says "No views yet. Select nodes on the canvas and choose *Save as a view*."
- **Opening one** reads the case through it, read-only. A banner says "View: ‹name›", whether it is shared or private, and "Nothing in a view changes the case.", with **Back to the case**. A view opened from an alert also says "Opened from an alert" and offers **← Back to the alert**.

5.14 Drawing boards

A **drawing board** is where you write down what you know that the data does not yet say: you declare a person, an account or a place, and draw the links between them. What you draw goes into the case's own **analyst layer**: it is read with the case's dataset but never written into it, and no other case can see it or infer it. The analysis canvas never draws.

Opening a board. Choose **Boards** in the context banner: "Drawing boards in case ‹name›". **New board** asks for a **Board name** and where to **Start from**: blank, **From a view of this case**, or **From the selection** (its items as live references); then **Make the board**. A new board is yours alone until you **Share with the case**; on a board someone else drew you read it, "Read only: drawn by ‹name›".

A drawing as a case of its own. New drawing as a case of its own asks for a **Drawing name**, the **Highest marking it may hold** and a **Starter model** (the POLE core alone, FIBO, NIEM or STIX), then **Start the drawing**. It makes a drawn dataset, its case with you as Author, and its board.

Drawing. Each item asks "What do you call it?", its type from the dataset's model, its marking, its **grading** in the deployment's scheme (5x5x5 by default: source, intelligence and handling) and where it comes from: a source note, a document the case holds, or both. Without a source it says "Give a source note or choose a document of the case: where this comes from." **Add to board** places it, "‹name› added to the board, with a watch for it". Dragging an item moves it. To draw a link, drag its → handle onto another item, hold Alt while dragging, right-click and choose **Draw a link from here**, or use **Draw a link...** from the keyboard; a link asks the same questions, then **Draw the link**. A link may join a drawn item to a loaded one; the loaded item is untouched.

- **The marking ceiling.** A board says the highest marking it may hold. An item, an edit or a picture marked above it is refused, in words.
- **Your own items only.** You edit the items you drew, and **Withdraw the item** (or **Keep it**) instead of deleting it; withdrawing ends its watch, and the record of it is kept.
- **Pictures. Add the picture** takes an upload, with **The picture's marking** and **Where the picture comes from**, or an image document already on the board. A reader not cleared for the picture sees none.

- **Looks like a loaded item.** Where a drawn item resembles something loaded, the board lists the pair: **Same: X is Y** keeps a link in this case ("Marked as the same: a link is kept in this case, nothing is merged"), and **Not the same** says the opposite. Neither changes the loaded item.
- **Who may draw.** You need the rights to draw on boards and to investigate, and only a board's creator draws on it.

Promote... sends what you drew into the case's dataset (it is not chosen: it is the dataset the case reads). It is offered to a board's creator; promoting also needs the case's Author level and the right to promote (`promote_to_dataset`), and without them you are told "You do not have the right to do that here." The sheet, **Promote into ‹dataset›**, says the dataset's highest marking and its policy ("you promote it", or "a second person reviews it first"), and lists **What goes**: each item, link, picture and match decision with its type and marking. Each is checked (its marking within the dataset's highest, its type in the dataset's model, its grading, and, for a link, both its ends going too), and one that cannot go says why. **Promote** (or **Send for review**) sends what you ticked as **one load**, and you are told, for example, "Waiting for review 3 items and 2 links into ‹dataset›, load ‹id›. A second person reviews it in the Ingest Studio; nothing of it is in the dataset until then." Each item stays marked as drawn, with its marking and grading. **Promotions from this board** lists each one as *Waiting for review*, *Committed*, *Rejected* or *Reverted*. A case reading no dataset, a case reading a composite, and a drawing that is its own dataset promote nothing, and say so. A promotion is reviewed by one of the dataset's Authors who may review promotions, never by you, and taken back like any load (the developer guide, section 7.8).

- **Alerts on a board.** A board shows an **Alerts** panel: the case's open alerts by source and age, and the newest, counted for you. Nothing is opened from it. On the canvas, an entity with open alerts carries a badge: **!** for one, **!3** for three.

When new data meets a drawn item. What you draw is watched in the case's dataset, with nothing to set. When a load writes something that looks like a drawn item (the same identifier, or a like name of the same type), a **Drawn items** alert, "A load met a drawn item", reaches Rules and Monitoring › Alerts, with **Open the board**, and the Ingest Studio's load result says how many it raised for you. The watch holds while you keep a level on the case. *Coming:* a list of your drawn items' watches, and a drawn link meeting new data.

5.15 Your own link types

When no type fits a link, an Editor may choose **Define a new type...** in the link's change form, say **Why does no type fit?** and **Propose type**. The type is usable in this case at once, marked proposed, while a data engineer of the dataset decides it in the Ingest Studio's **1 Model** (added to the draft domain model, or declined); the person who proposed it never decides it. Its links stay in the case's analyst layer.

6. Questions to the model

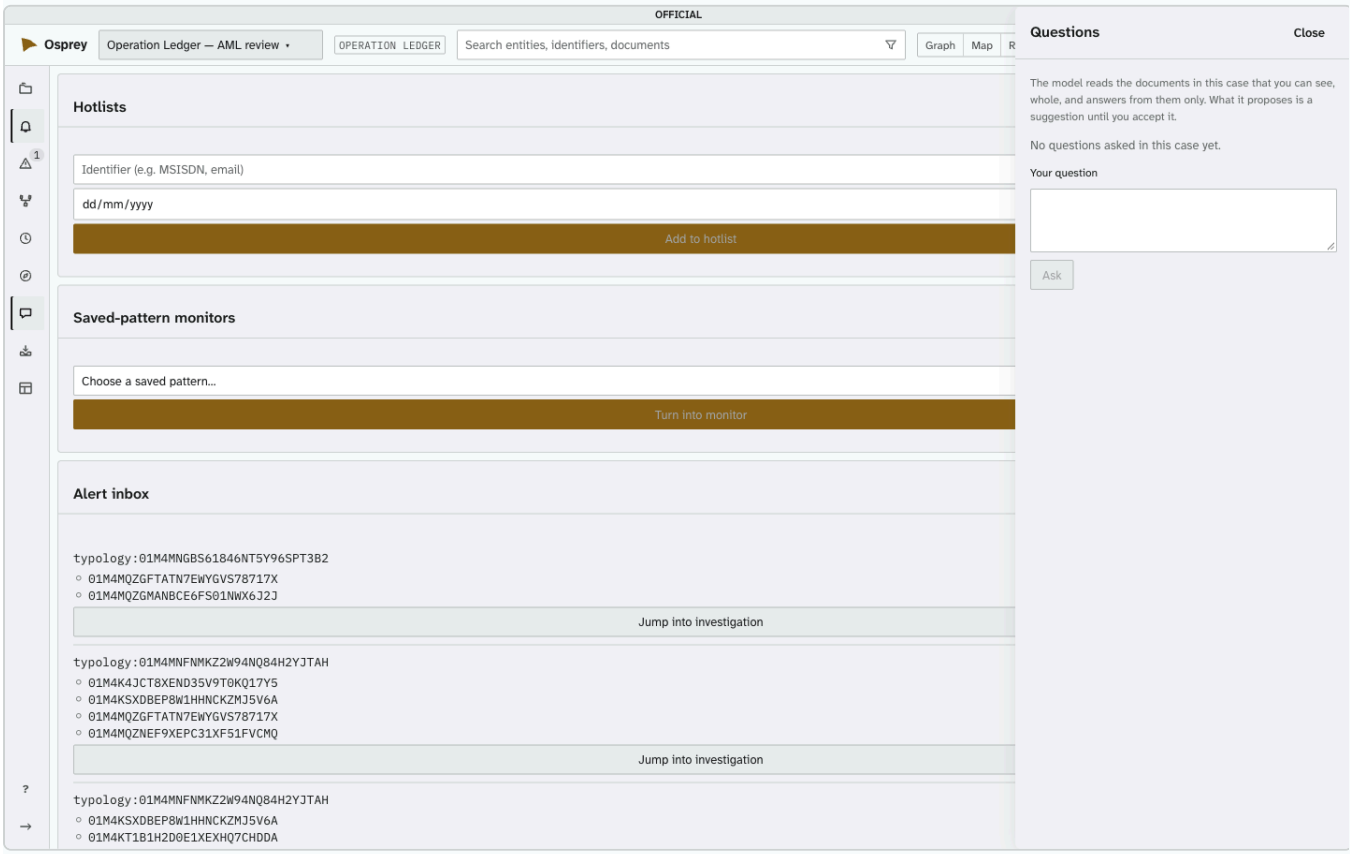


Figure 14. Questions: ask about the documents in this case

Questions asks the deployment's model about the documents in this case that you can see, and about **graph facts**. It answers from those only, citing each — **Draws on** opens a document. What it proposes, you **Accept** or **Reject**; an accepted proposal enters the graph as *inferred*. **Ask the model about these…** on a selection of documents starts a case of its own for them. Asking needs Editor, and at least one document you can see in the case.

Graph facts. Along with the documents, the model is given a numbered, plain account of the graph around what you have selected and one link beyond it (the whole view when nothing is selected). A timeline period, if one is set, limits the links and events to it. The account lists each entity by type and name; each link among them as a fact, `[G-1]`, `[G-2]`, with its type, its two ends by name, its first and last date, how often it occurred, its dataset's label and whether it is direct or inferred; and the events for each month. It holds only what you may see, and never an identifier of the system. It has no path facts: a question about a connection is answered from the links it holds.

In an answer, each `[G-n]` is a button, "Select [G-1] on the canvas". It selects what the fact stands for and brings it into view: the link if one drawn link is meant, otherwise its nodes. A fact the model cites that was not in the account it was given is dropped and counted among the items left out.

The documents and the graph facts share one limit. Over it, the question is refused, saying how many characters each came to and the limit, and that nothing was sent: narrow the selection, narrow the timeline window, or open a smaller view of the case, then ask again. Your question stays in the box. Nothing is trimmed. An answer is shown later only to someone who could see every item it was built from, so a reader cleared lower does not see an answer built on events above their clearance. An answer kept before that was recorded may still be shown as before.

Choosing the engine. Where the deployment offers more than one model engine, a **Model engine** choice sits above your question: the deployment's own model, and any provider your administrator has enabled, such as Gemini. The one your administrator chose is selected; change it before you ask to use another. Where only the deployment's own model is offered, there is no choice to make, and none is shown. Choosing an engine is a request, not a promise: material your deployment may not send outside is always answered by its own model, whatever you choose. If an engine cannot be used — it is no longer enabled, or has no key — the question is refused in words and nothing is sent; choose another and ask again.

Engines you cannot choose, and why. Beside each provider the choice says **under contract** or **no contract**: whether your organisation holds a privacy agreement with that provider. Your administrator also decides, for each dataset, whether its material may be sent to a provider at all: never, only to one under contract, or to any. An engine your case's data may not reach is still listed, marked **not available**, and cannot be chosen; the reason is written beneath the choice, for example "Gemini: Not available for this case: “Enron corpus” is set to egress none, never sent to a hosted engine such as Gemini." If the engine your administrator made the default is one of these, the deployment's own model is chosen instead. Every dataset starts at "never", so until your administrator changes yours, every question is answered by the deployment's own model.

"Answered by ...". Under each answer, a small line says which engine and model produced it, for example "Answered by Gemini (gemini/gemini-2.5-flash)" or "Answered by This deployment's own model (qwen2.5:7b-instruct)". It is what the deployment says it used, not what you chose. An answer kept before engines were named has no such line. **Ask to search** shows the same choice and line, and the choice applies there too: your question is about the case, so it goes under the case's handling and from the case's datasets, through the same two checks as Ask the case. It reaches the engine you chose only when the case's material, as you see it, may leave the deployment and every dataset of the case allows that engine; otherwise the deployment's own model answers, and its line says so.

On a deployment with a GPU. Where your administrator has given the deployment's own model an NVIDIA graphics card (GPU), that model answers much faster than on a computer's processors alone, and it is a larger one: its line then reads "(qwen2.5:14b-instruct)" instead of "(qwen2.5:7b-instruct)", unless your administrator chose the smaller model. Nothing else changes: the same material stays in the deployment, and the same checks decide which engine answers.

To ask in words for a pattern rather than an answer, use **Ask to search** in the query builder (section 5.10).

7. Monitoring and alerts

> **Alerts are worked in Rules and Monitoring**, the fourth place (key `R`), which the Analyst and Rule author roles open. Its tabs are **Alerts**, **What raises alerts**, **Held rows** and **Changes**. An alert has its own address, and **Open the evidence** saves a private view of the case and opens it with **← Back to the alert**. The alerts journey (one queue, what raises alerts, watches, team routing, *Raise an alert* and the rule editor) is built, and the v0.5.0 release notes describe it; this section is still to be rewritten for it. Where it says *Monitoring*, read Rules and Monitoring.

7.1 The Rules and Monitoring place

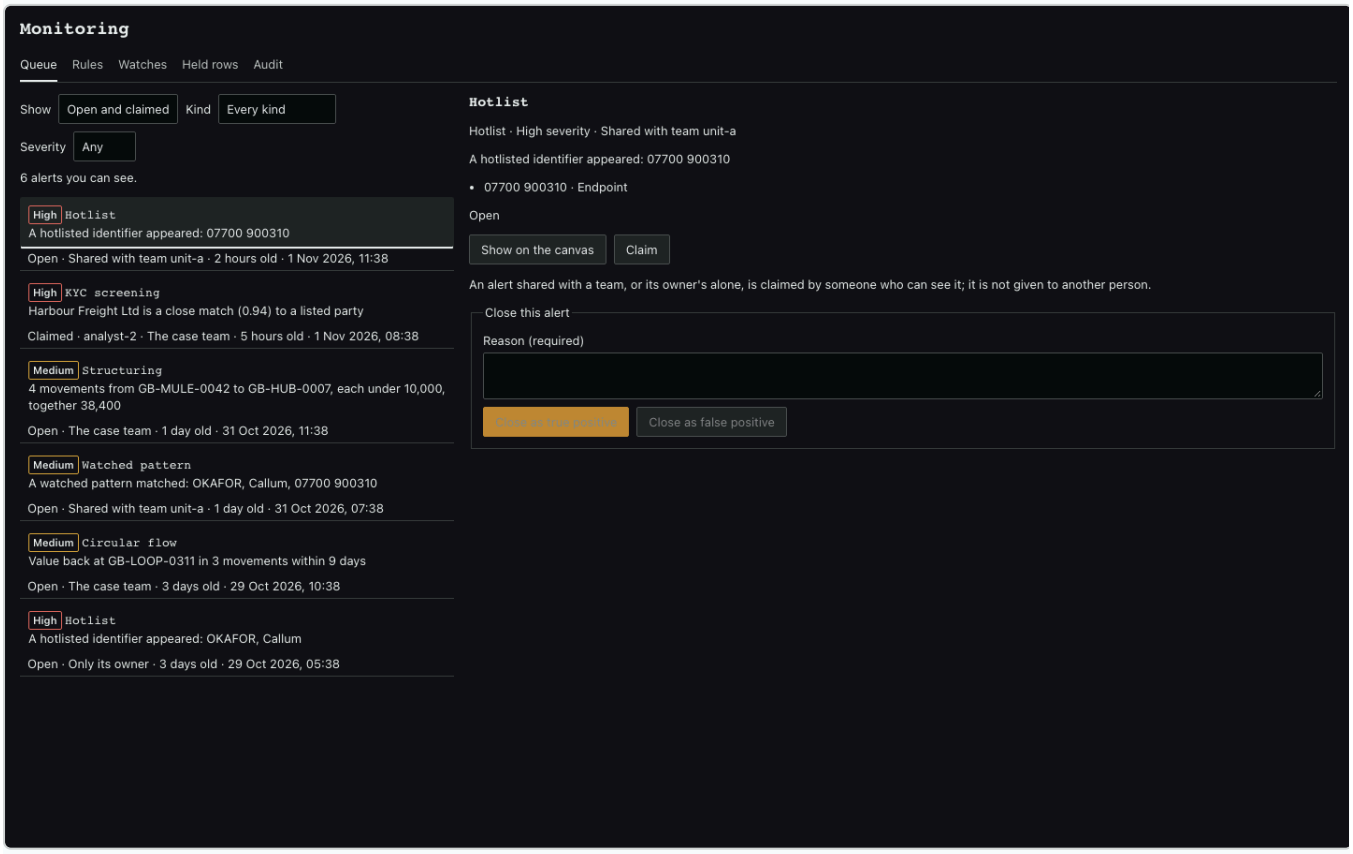


Figure 15. Rules and Monitoring: the alerts, with a hotlist alert open

Rules and Monitoring (key `R`) is the place for alerts. Its tabs are **Alerts**, **What raises alerts**, **Held rows** and **Changes**. **Connection strength** is not here: it is in the Glass's rail (section 5). What follows describes the alerts themselves, which the rewrite named above keeps.

The queue holds every kind of alert you may see, in one list:

- **rule alerts**, raised by the case's rules — structuring, rapid movement, circular flow, screening matches, shared contact details, unverified customers, and patterns drawn by analysts;
- **hotlist alerts**, when data touches an identifier on a hotlist (section 7.5);
- **watched-pattern alerts**, when a monitor's saved pattern matches new data.

An alert concerning anything you cannot see is neither shown nor counted, whatever its kind.

Each row says its **severity**, what kind it is and what it found, then where it stands (open, or claimed and by whom), **who may see it**, how long it has waited ("2 hours old") and when it was raised. The most severe come first, then the newest. **Show**, **Kind** and **Severity** above the list choose which alerts to list; the choice is made by the server, so a count always means what it says.

7.2 Severity and who sees an alert

Every alert is **high**, **medium** or **low**. Until rules can set their own (a later release), each kind has its own:

Alert	Severity
A hotlist match	High
A screening match	High
Shared contact details	Low

Alert	Severity
Any other rule, and a watched pattern	Medium

Who may see an alert is shown on its row:

- **The case team**: a rule alert reaches every member of the case.
- **Shared with team ...**: a watched pattern's alert, and a hotlist's alert when its owner has shared it, reach the owner and the people of the owner's **unit** (the unit your administrator gave your account).
- **Only its owner**: a hotlist kept to its owner, and an alert raised before teams existed.

7.3 Working an alert, and closing it

Open one to see why it was raised and what it concerns; **Show on the canvas** draws them. **Claim** it to work on it (**Release** gives it back). A rule alert can also be **given to** a member of the case: choose them by name under **Give to**, then **Give**. *Give to* lists the case's Editors and Authors who are people; an account a service or a loading script uses is never offered. An alert shared with a team, or its owner's alone, is claimed by someone who can see it, never given to another person.

Closing needs a reason, in two parts. Choose one **closing reason** — **True match**, **False positive**, **Duplicate**, **No further action** or **Referred** (the arrow keys move between them) — and say why in words; **Close the alert** stays unavailable until you have done both, and words of only spaces are refused. **True match** confirms the node it raised; every other reason leaves it a suggestion. OspreyFlow accepts no reason outside this list. Triage needs Editor; a Viewer reads. **Closing a high-severity alert needs a second person** (§7.12): closing it proposes the close, and another member approves it.

7.4 Rules and templates

The **Rules** tab shows the rules judging this case; an Author deploys and retires them. Above the form, **Templates** lists the typologies as named starting points (the four new AML templates are in §7.9), grouped by the work they serve (anti-money-laundering transaction monitoring, KYC, any case), each with what it looks for and the severity of its alerts. **Use** fills the form with the template's defaults and puts you on the rule's name; change anything, then **Deploy**. Everyone in the case sees the templates; only an Author has **Use**. A rule can also be written as a sentence (§7.6).

The money-flow templates (structuring, rapid movement, circular flow) judge each load's movements with the movements around them, and only those whose two accounts the rule's author may see, in the rule's own dataset: a movement between accounts hidden from them shapes no finding.

7.5 Watches, and whom a hotlist's alerts reach

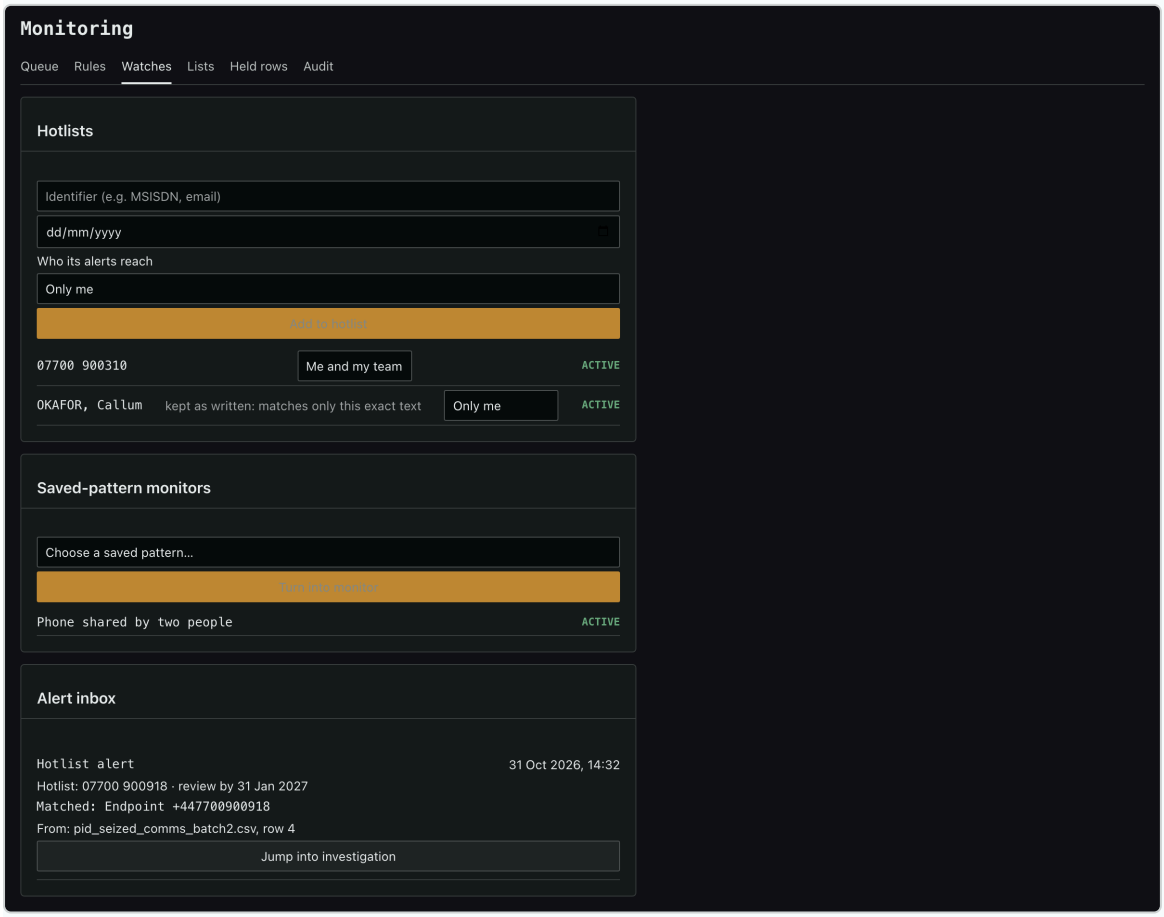


Figure 16. Watches: hotlists, monitors, and the alerts they raise

The Monitoring place's **Watches** tab keeps a **hotlist** of identifiers — a phone number, an email address, an account number — each with a review date: any data that touches one raises an alert. An account number is matched however its spaces are written: `GB58 LOYD 3096 1700 7099 43` and `GB58LOYD30961700709943` are the same account. A **monitor** runs a saved pattern against new data. Both watch only their case's data. Under them, the **Alert inbox** lists what your hotlists and monitors raised; **Jump into investigation** starts a case from an alert. There is no separate Watches place on the left rail: open **Monitoring**, then **Watches**.

Who its alerts reach. Each hotlist says who its alerts reach in the Monitoring queue: **Only me**, or **Me and my team**. A new hotlist starts from your deployment's choice (only you, unless your administrator has chosen otherwise); change it when you make the hotlist, or later on its row. A hotlist made before this choice existed reaches only you until you change it. Where your deployment fixes the choice, the panel says so ("Alerts reach only you. The deployment sets this.") and offers none. A match on data you cannot see is never shared with your team. An alert whose evidence you cannot see says only that a match fired.

A hotlist alert explains itself. In **Watches**, under **Alert inbox**, a hotlist alert is headed "Hotlist alert" and reads, for example:

- "Hotlist: 07700 900640 · review by 31 Jan 2027": the identifier **as you typed it**, and the hotlist's review date. If OspreyFlow could not read the text as a phone number or other known kind, it was kept as written, and the line says "(kept as written)".
- "Matched: Endpoint +447700900640": the type and name of what it matched.

- "From: pid_seized_comms_batch2.csv, row 3; pid_pin_calls.csv, 2,013 rows": the files the matched record came from, and the row in each, or how many rows. Up to five files are named, in the order they were first seen; the rest are counted, "and 3 more files", not cut. Where a source has no row, it counts records instead.

Row numbers count data rows from 1: the first row after the header is row 1, so "row 3" is the third data row, the fourth line of the file. The Inspector's source, a link's details, Verify's rejected rows and held rows count the same way. Where two loads of a file with the same name matched, each is listed. **Jump into investigation** is as it was. Raw rule and node identifiers are no longer shown.

Only the hotlist's owner sees the identifier and review date, and an alert on another analyst's hotlist is not listed to you. An alert about something you can no longer see says only "A match fired — no evidence visible to you." If the matched record was removed from your view between the two reads, the alert says "Evidence no longer available." and cannot be jumped into. **Where a matched record belongs to data this case does not read**, the alert names its type and name and says "its sources are in data this case does not read", with no file and no row (section 5.6): a file name is as much a source as a row.

7.6 A rule written as a sentence

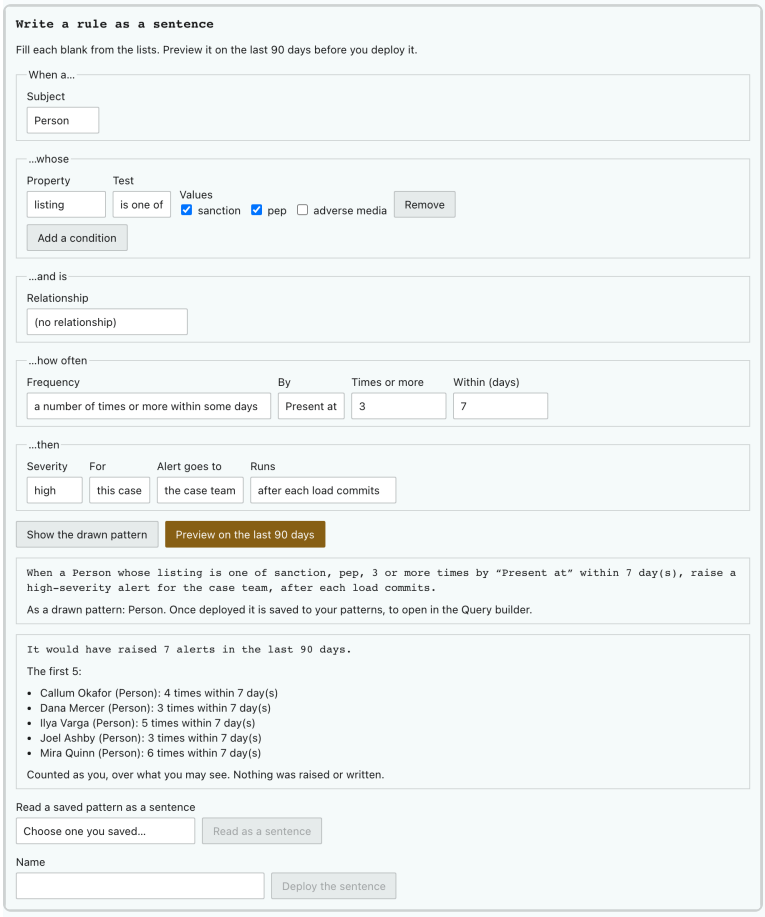


Figure 17. A rule written as a sentence, its drawn pattern, and its preview on the last 90 days

On the **Rules** tab, **Write a rule as a sentence** builds a rule from blanks, read as one sentence: *When a* subject *whose* conditions, *and is* related to something, *how often*, *then* raise an alert. Every blank is a choice from a list made from the deployment's ontology — its types, their properties and its link types — so there is nothing to type that could fail to be understood.

- **Subject.** A type, grouped as people, objects, locations, events and organisations.
- **Whose.** Up to five conditions on the subject's properties: *is*, *is one of*, *is above*, *is below*, *is within a time window*, or, for a location, *is within a drawn area* (entered by its four corners). A property marked highly sensitive is never offered.
- **And is.** Optionally: *linked by* a link type to something; *within* 1 to 4 *steps of* something of a type; *at a location in a drawn area*; *on one of my hotlists*; or, for a person or an organisation, *on a screening list* at a name match you choose.
- **How strongly connected.** Optionally: *the connection strength* between the subject and something it is linked to (by a link type, or any; to a type, or anything) *reaches* a figure up to 1, or *on the client's scale* a raw sum up to 10 (met only under client parity); or *the shared-attribute rarity* between it and another of its type *reaches* a figure, per dataset or across the case's datasets (§5.12). Both are read from the stored graph, so the rule runs after commit or on a schedule, and both are worked out as you, the rule's author, may see them.
- **Then.** The alert's severity; whether it goes to the case team or is labelled for your team; and when the rule runs — after each load commits, or before it. Before commit you also choose what a hit does: load with its alert, or hold its rows for a reviewer in **Held rows**. A rule that names a link runs after commit, since a link is read from the stored graph.
- **For.** *just me* (the alerts reach you alone, like a monitor's), *this case*, or — for an administrator — *the whole deployment*, which watches every case's loads.

Show the drawn pattern shows the same rule as the Query builder would draw it. Once deployed, the pattern is saved among your patterns, and you can open and change it there: the rule follows the pattern as it now reads. **Read a saved pattern as a sentence** goes the other way, from a pattern you drew to a sentence. A pattern a sentence cannot say (more than one link, or a pinned node) is refused in words.

Deploying needs a name. A case Editor may deploy a rule *just for me*; a case Author deploys one for the case; only an administrator, who is also the case's Author, deploys one for the whole deployment. A sentence that names something the ontology does not declare is refused, naming the blank.

7.7 How often: frequency and amount conditions

A sentence may also say how often:

- *a number of times or more within some days* — for example, present at a location 3 or more times within 7 days;
- *a total amount over a figure within some days* — the total of a link's declared amount, such as a payment's amount, over 10,000 within 30 days;
- *for the first time ever* — the subject's first event of that link type.

The events counted are those of the link type you choose, with the subject at either end. They are counted as the rule's author: an event you may not see adds nothing to a count or a total, and is never a "first".

7.8 Preview on the last 90 days

Preview on the last 90 days runs the rule as you, over the case's stored data, and says how many alerts it would have raised, with up to five of them. Use it to set a threshold against evidence before you deploy. A preview raises no alert and writes nothing. It counts only what you may see, so it says nothing about anything hidden from you. If the rule would judge more subjects than the working-set limit, the preview is refused and counts nothing: narrow the sentence and preview again. Frequency conditions are counted over the 90 days.

7.9 The AML templates: jurisdiction, cash, dormancy and velocity

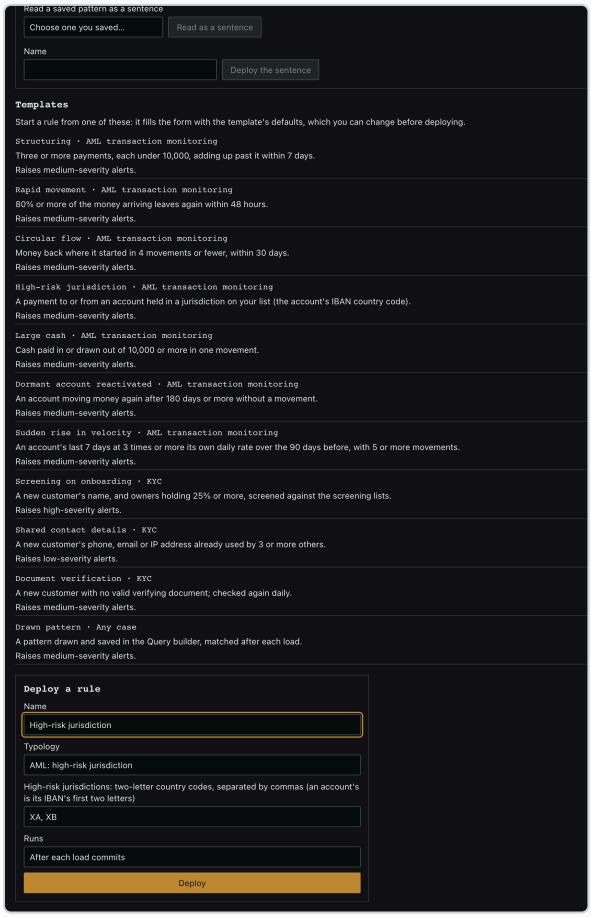


Figure 18. The Rules tab: the AML templates, and the form filled from "High-risk jurisdiction"

Four templates watch a case's money movements (its *transacted* links), each with settings you choose and no formula to write:

- **High-risk jurisdiction** — a payment to or from an account held in a jurisdiction on your list. Type the list as two-letter country codes, separated by commas (for example `XA, XB`): the list is part of the rule, so your organisation's policy list is what you enter. An account's jurisdiction is its IBAN's country code, the IBAN's first two letters; an account whose number is not an IBAN has no jurisdiction here.
- **Large cash** — cash paid in, drawn out, or either, of an amount at or over a threshold (10,000 by default) in one movement.
- **Dormant account reactivated** — an account moving money again after a number of days (180 by default) without a movement. An account that has never moved before is new, not dormant.
- **Sudden rise in velocity** — an account whose movements over the last days (7) run at a factor (3) or more of its own daily rate over the days before (90), with at least a minimum (5) in the last days; measured by the number of movements or by the amount moved. An account with nothing in those days before has no rate to rise from and raises nothing.

Each raises a medium-severity alert in the queue, in words: the movement, the accounts and what made it a finding. They judge only movements and accounts you could see as the rule's deployer: a movement hidden from them neither wakes a dormant account nor adds to a rate. The last two compare an account with its own stored past, so they run after each load commits.

7.10 Screening lists, re-screened when they change

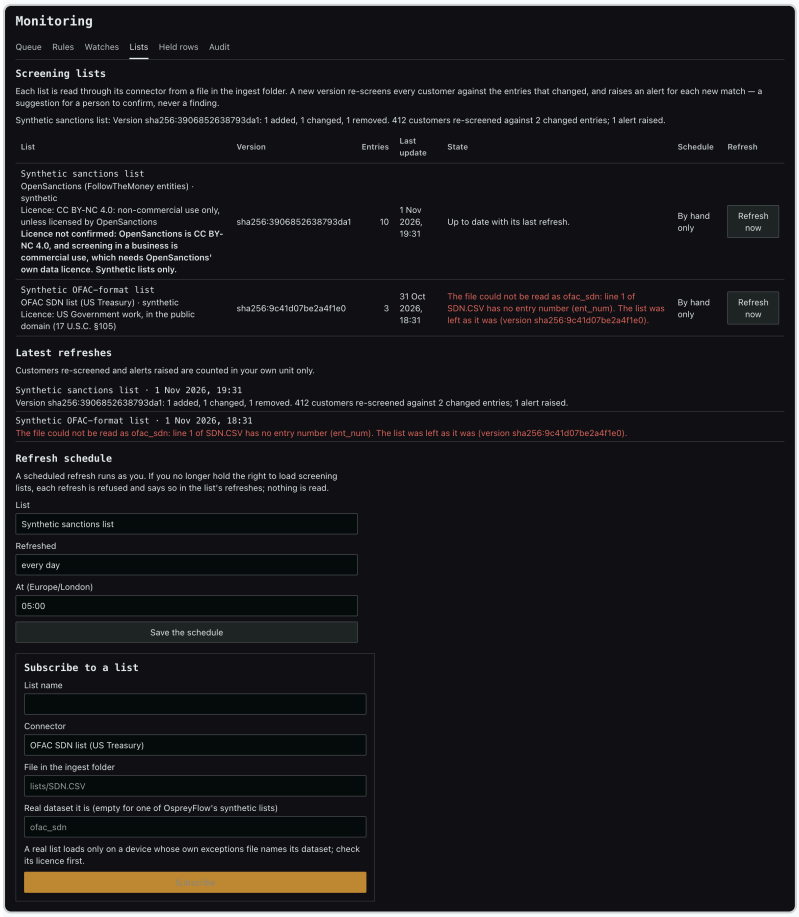


Figure 19. The Lists tab: each list's version, entries, last update and state, the latest refreshes, and subscribing

The **Lists** tab shows each sanctions, PEP or adverse-media list the deployment screens against: the list it is (OFAC, the FCDO's UK Sanctions List, the UN or EU consolidated list, OpenSanctions, or HM Treasury OFSI's, which closed on 28 January 2026 and is marked "Closed list"), its version, how many entries it holds, when it last changed, its licence, and its state — up to date, not yet read, or why its last refresh failed, in words. A list read from a file that is not in its publisher's format is left as it was, and says so.

When a list changes, OspreyFlow re-screens every customer in every case that has a **Screening on onboarding** rule (§7.4) against **the entries that changed only** — those added and those whose names, date of birth or country changed. An entry that did not change was screened when it arrived, so it raises nothing again. Each new match raises a high-severity screening alert in that case's queue, naming the customer and the list entry, with its score. Like every screening match, it is a suggestion: the link between the customer and the listed party is inferred until a person confirms it, by closing the alert as a **True match** (§7.3). Customers are screened as the rule's deployer and within the case's datasets, so no one is screened, or alerted on, outside what that person may see.

Licence not confirmed. The **UN** and **OpenSanctions** lists are marked "Licence not confirmed", with the reason: no open licence was found for the UN list, whose general terms allow personal, non-commercial use only; OpenSanctions is CC BY-NC 4.0, and screening in a business is commercial use, which needs its own data licence. Until a licence is confirmed, these connectors read OspreyFlow's synthetic lists only.

Administrators and data engineers subscribe to a list and refresh it from this tab (the administration guide, §9.5, says how), and may have it refreshed every day or every week; the **Schedule** column says when, or "By hand only". They see how many customers each refresh re-screened, and the alerts it raised, **in their own unit only**. Everyone else sees the lists, not those numbers.

7.11 A rule that runs on a schedule

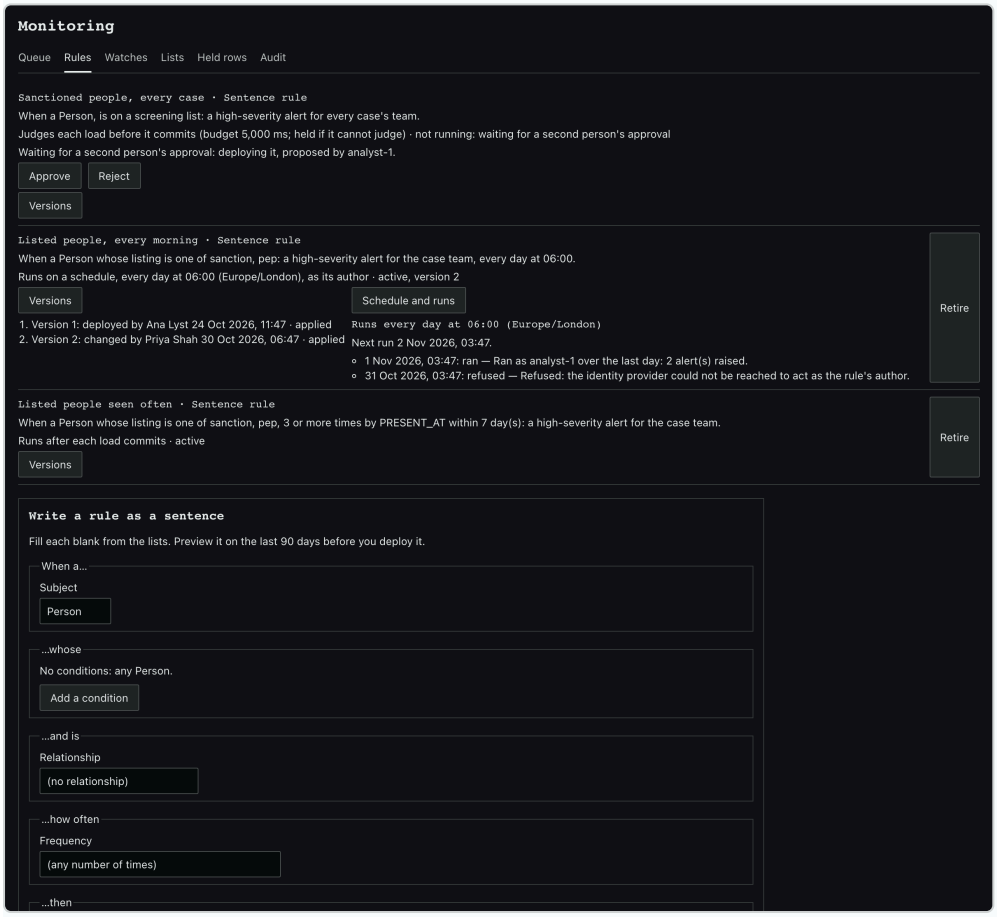


Figure 20. A rule written to run every day: its schedule, its runs, and the versions it has had

A rule written as a sentence (§7.6) runs as data loads — before or after each load commits — or **on a schedule**. Choose **Runs: on a schedule**, then **Every** day or week, the day for a weekly rule, and the hour (UK time). At each run the rule looks at what is already stored over the last day or week, as you see it, and raises an alert for each new finding, once.

- **It runs as you**, its author, never as the system: it judges only what you may see, and only while you may still sign in, deploy rules and are still an Author of the case (an Editor, for a rule just for you).
- **Schedule and runs**, under the rule, says when it runs next and what each run did: how many alerts it raised, or why it did not run, in words. A run the deployment missed while it was down is said too; after downtime only the latest run happens.
- **If it is refused three times in a row** — say, because you can no longer sign in — it stops, and says why. Changing the rule starts it again.
- A rule for the whole deployment does not run on a schedule: it is judged within each case as that case's data loads.

7.12 A second person's approval

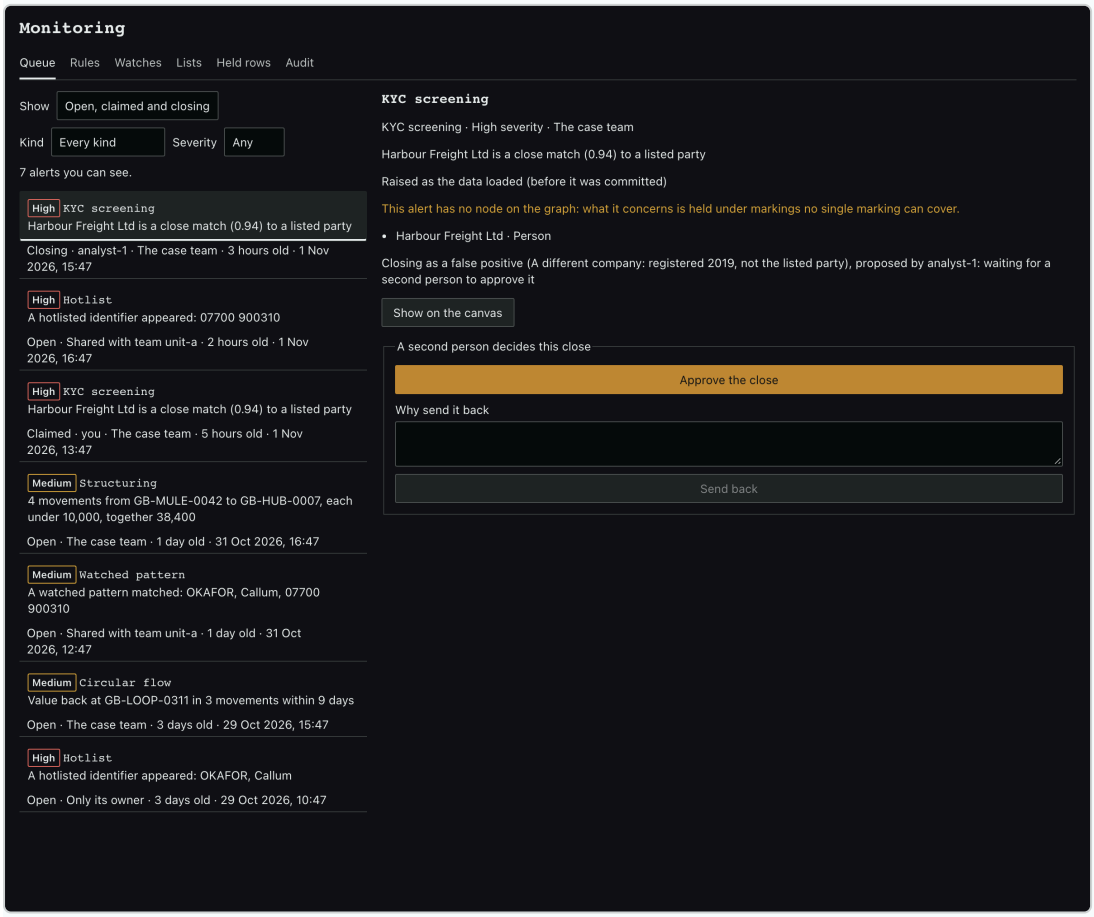


Figure 21. A rule for the whole deployment waiting for a second person, and a high-severity alert whose close waits for approval

Two decisions need a second person with the right, and the person who proposed one can never approve it.

A rule for the whole deployment (§7.6) — deploying it, changing it or retiring it. A new one is listed as *not running: waiting for a second person's approval*, with who proposed it; a change or a retirement waits beside the rule, which runs as it stood until then. Another administrator who is an Author of the case sees **Approve** and **Reject** (with a reason); a rejected rule never runs. A rule for one case, or just for you, is not held up: it runs as soon as it is deployed or changed.

Closing a high-severity alert that someone else may see. Choosing a closing reason, writing why and **Propose the close** proposes the close: the alert stays in the queue as *Closing*, with your reason. Another member who triages alerts in the case opens it and chooses **Approve the close**, or **Send back** with a reason, which returns it to you, claimed. You may withdraw your own proposal the same way. An alert only you can see (your own hotlist's, kept to you) has no second reader, and you close it alone.

Every rule keeps its versions. Versions, under a rule, lists each one: what it did (deployed, changed or retired), who made it and when, and who approved or rejected it. A changed rule runs as the person who wrote the change, since it is their judgement now. Everything here is in the case's rule audit.

8. Ownership and due diligence

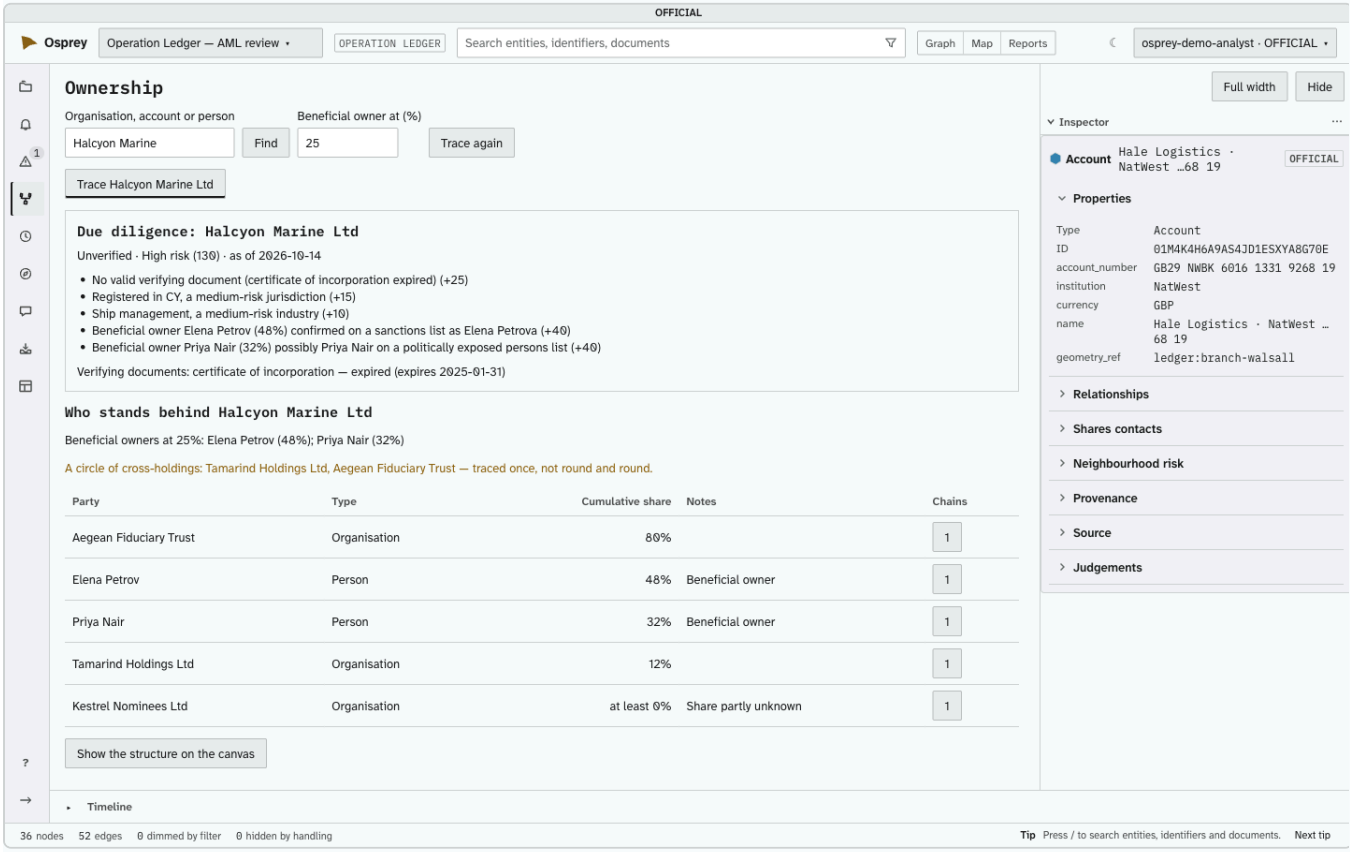


Figure 22. Ownership: who stands behind an organisation, and its due diligence

The rail's **Ownership** traces who stands behind an organisation or account: every beneficial owner at or above the threshold (25% by default), their cumulative share through each chain, and anyone holding control whatever their share. A circle of cross-holdings is traced once, and said so. **Due diligence** gives the verification status, risk band and score with each factor's weight, and the verifying documents. All of it is worked out as you read, from what you can see, and stored nowhere. **Show the structure on the canvas** needs Editor.

9. Figures and dashboards

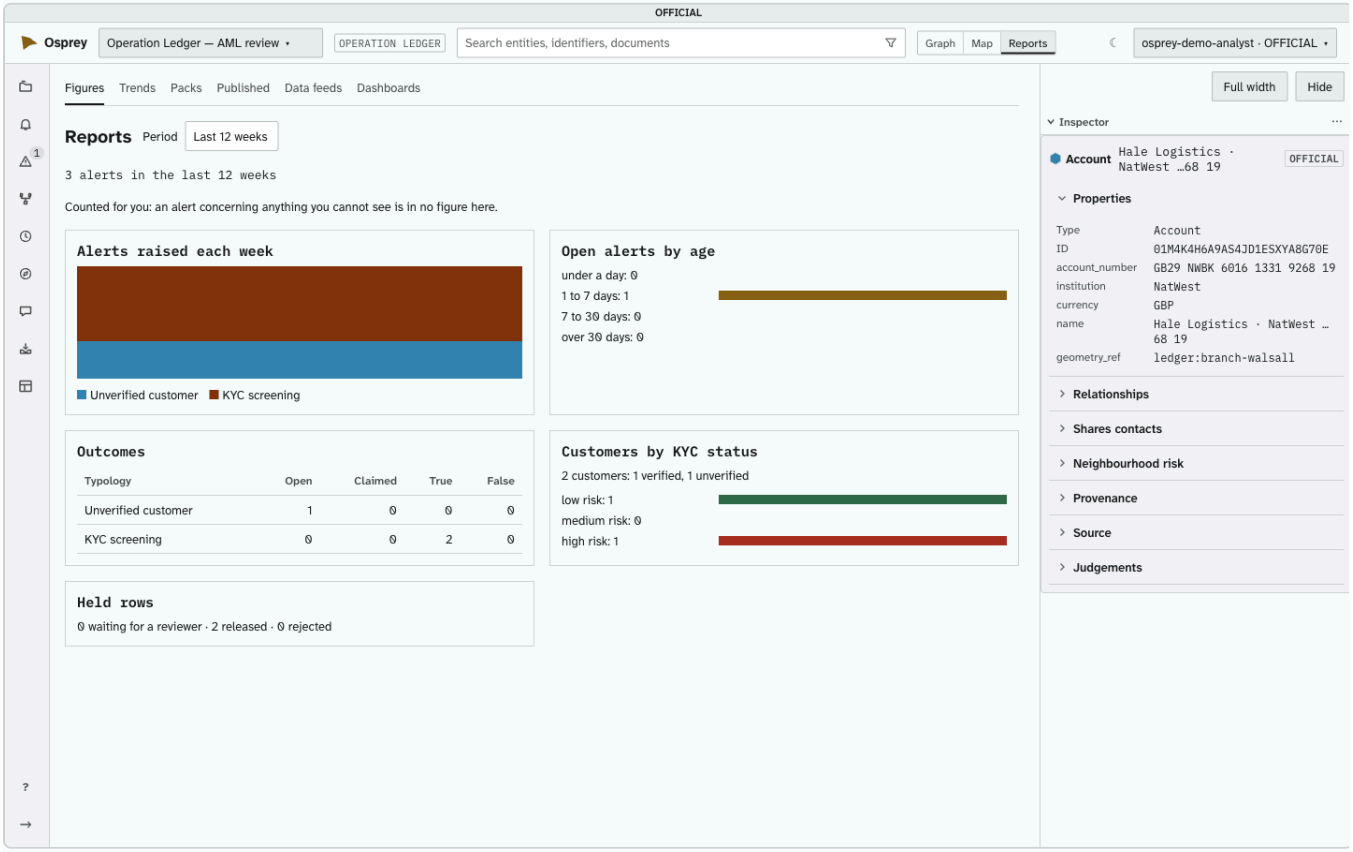


Figure 23. The case's Figures

Figures (under **More views** in the view switch; a Reports Viewer has it in the switch itself) shows the case's own counts over a **Period** of the last 4, 12, 26 or 52 weeks: an **Alerts** panel (open alerts by source and age, and the newest), alerts raised each week, open alerts by age, outcomes (open, claimed, each closing reason, and closed with no outcome), customers by KYC status, a summary of the case's people, objects, locations and events, and held rows (for Editors and above). **Download the figures (CSV)** is there for whoever may read the case's feed. Every figure is **counted for you**: anything you cannot see is in no figure. A period too long to count says to choose a shorter one; it never shows part of a chart. *Coming:* a **Drawing** panel (drawn, promoted, awaiting review, withdrawn): the Glass has it, but the Conduit does not count it yet, so it is not shown.

Beside Figures, as your rights allow: **Trends**, **Packs** (report packs, exported to PDF), **Published** and **Data feeds**.

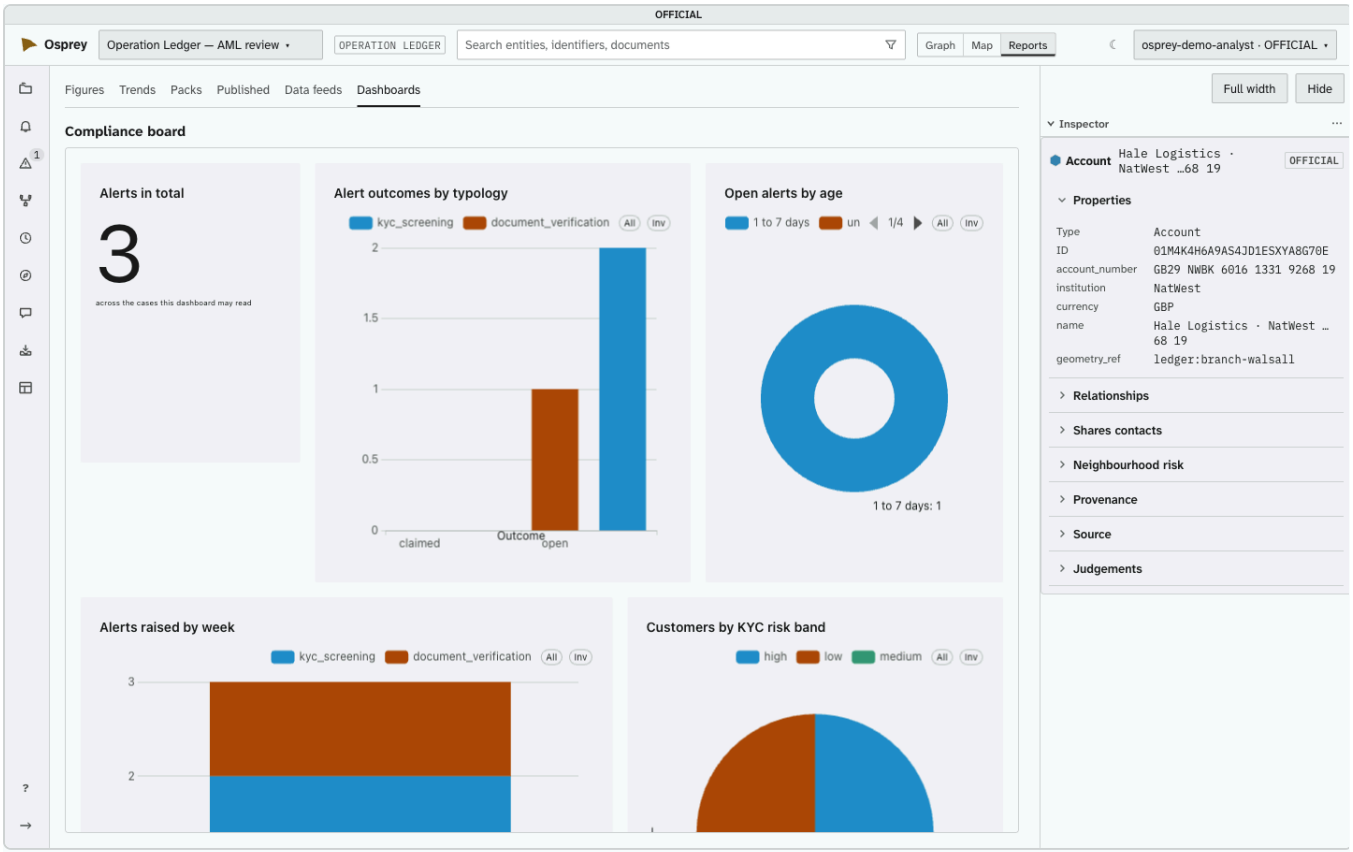


Figure 24. Dashboards: a board drawn inside the Glass

Dashboards, on the rail, is the one door to the deployment's boards, drawn inside the Glass and showing only those you may open. The same boards are at `bi.` in front of the deployment's address, signed in the same way. The first is **Alert monitoring**: alerts raised each week and by rule, closed by outcome, time to close, hotlist matches, and the team view.

For a Reports Viewer. Home lists the alerts on the cases you can read, each with **Open in its case** and **Open the dashboard**; you never work an alert. **Open in its case** opens the case's Figures with the panel the alert concerns outlined; **Open the dashboard** opens Alert monitoring, filtered to the alert's rule and period. Both say "From alert: ‹title›", with **← Back to your alerts** to return Home.

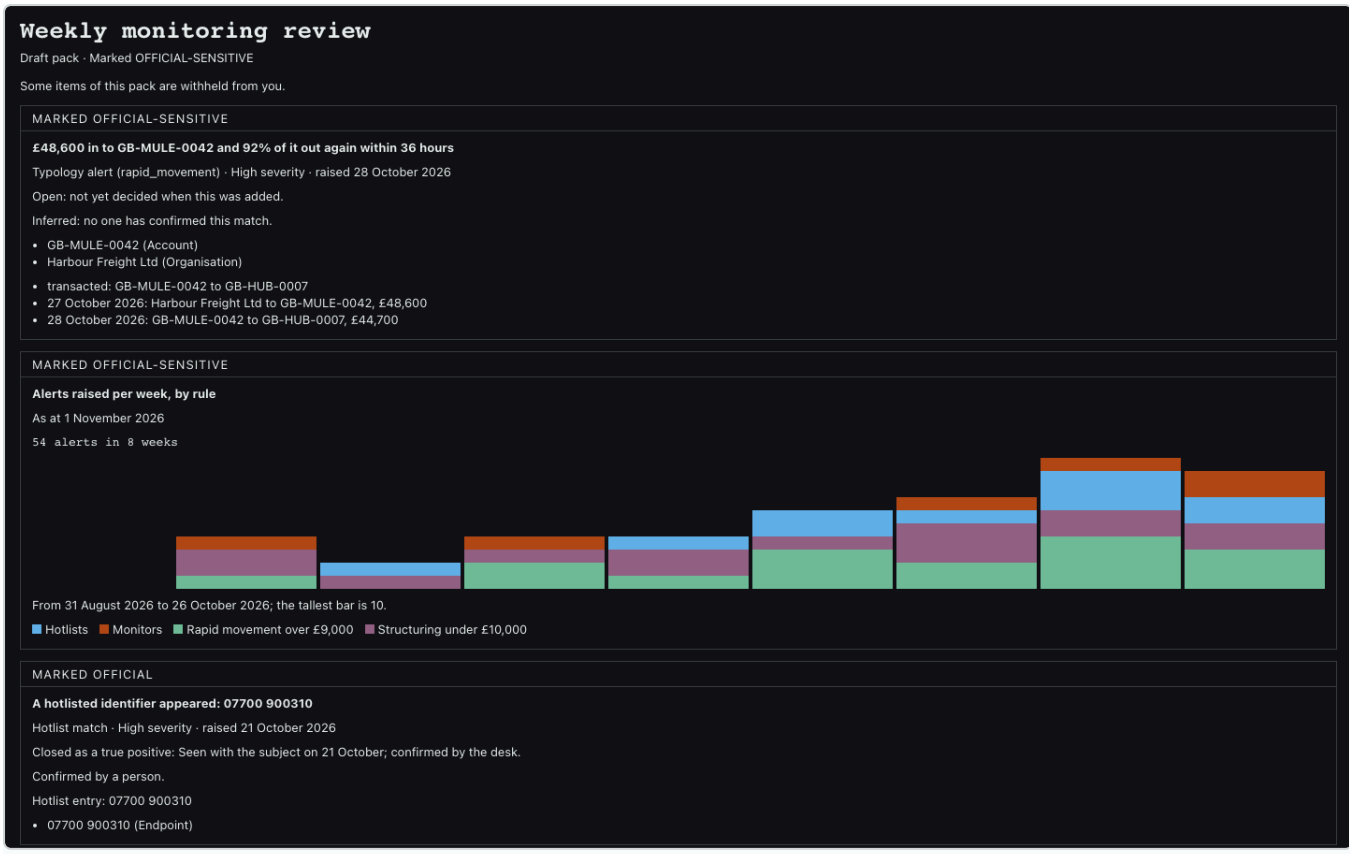


Figure 25. A report pack holding an open alert, a trend over alerts and a closed alert

9.1 Alerts in a report pack

In **Packs**, under **Add an item**, choose **Alert** and then one of the alerts of the case's queue that you can see (each listed by severity, status and what it found). The pack keeps the alert as it was when you added it:

- what it found, in words, its kind, its severity and when it was raised;
- the entities it matched, and its evidence: the links and transactions it cites;
- whether it was still open: an open alert says "Open: not yet decided when this was added";
- if it was closed, its closing reason (for example "Closed as True match") and the words given;
- "Inferred: no one has confirmed this match" until a person confirms it, by closing it as a True match. A match is never shown as confirmed on anyone's behalf.

Refresh reads the alert again, so an alert added while open can show how it was closed; the earlier copy stays in the pack's history.

An alert item is marked at the highest marking of what it cites, and rests on every node, link and transaction it cites. A reader who may not see all of them does not get the item, and is told only that some items are not shown, never how many or which. The same sentence covers an item whose alert has since been taken back for everyone: reverting the load that raised it (an administrator's task) takes back the alert with the load, so its item is not shown to anyone, its adder included. Exporting checks each item again for the person exporting; someone who may see none of it is refused, and nothing is recorded.

9.2 Alert trends

In **Trends**, **What to count** offers **Events** or **Alerts**. An alert trend counts the alerts raised each week or month that you may see. Split it by **rule** (each typology rule by its name, hotlists together, monitors

together), **typology**, **severity** or **outcome**, and narrow it with up to five filters on the same fields. Alerts are counted, never summed. An alert on something you cannot see is in no bar and no total. Save an alert trend and add it to a pack as any trend; it is bounded in the same way (104 periods and 12 series), and past that you are asked to narrow it.

9.3 The monitoring dashboard

The figures dashboards read now include monitoring figures for every kind of alert: alerts raised per week by rule, alerts closed per week by outcome, how long alerts took to close, and hotlist matches per week. They are counted as the dashboard's own account may see them, case by case. A hotlist kept "only me" is counted for its owner alone, so it never appears on a shared board. An administrator sets the board up (administration guide §12).

10. Judgements

The Inspector's **Judgements** records what you conclude: a statement, how likely it is on the probability yardstick, and the evidence for and against. A judgement cannot be saved without at least one supporting reference. Gaps (open, tasked, answered, closed) and assumptions (with what follows if one is false) are recorded the same way. A judgement is hidden from anyone who cannot read all of its supporting evidence, and flagged for review when something it cites is corrected or split.

11. Export

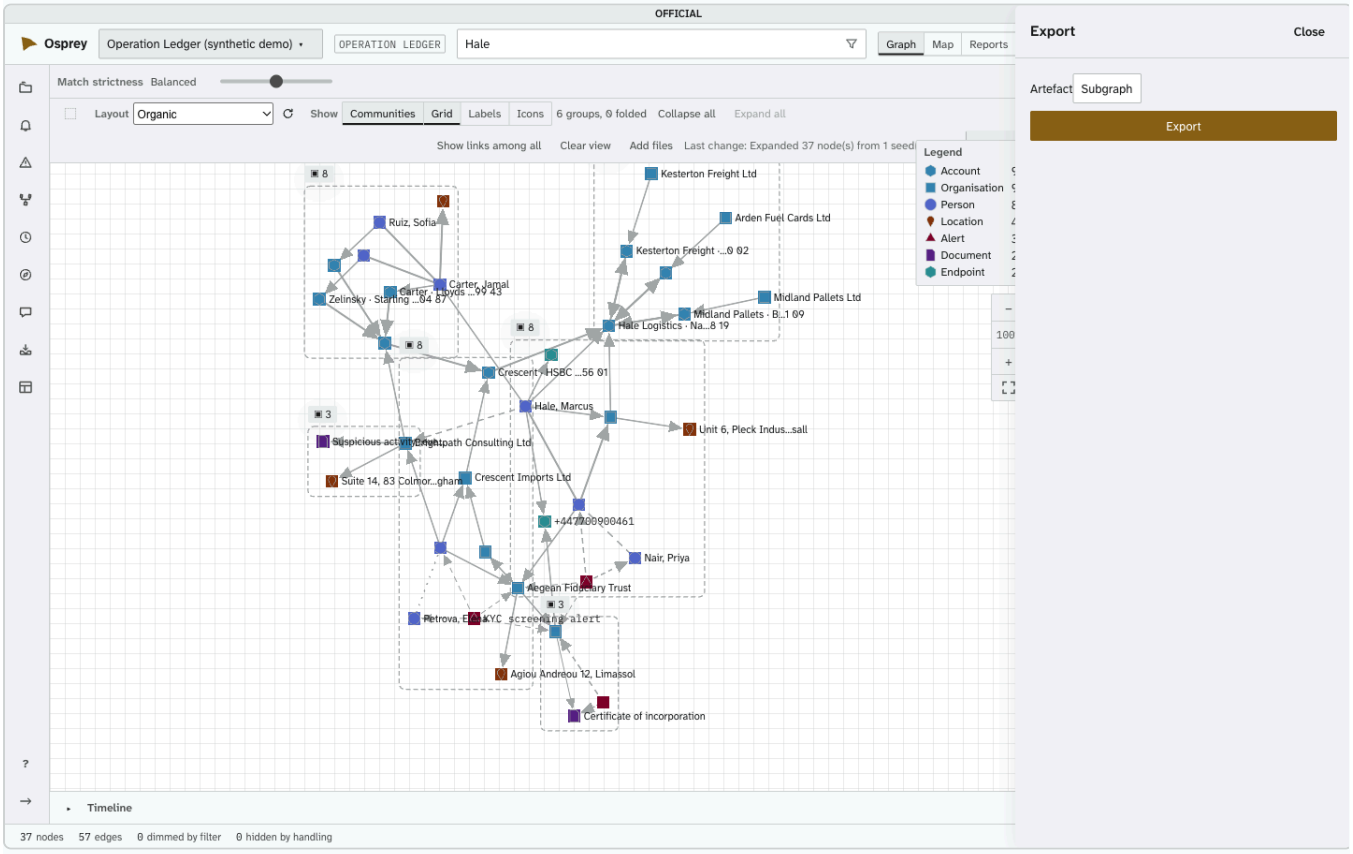


Figure 26. Export: the subgraph on the canvas

Export (on the Graph view) saves what is on the canvas:

Artefact	File
Subgraph	JSON
Chart	PNG
Report	A self-contained HTML page

Each export is marked — the handling level and the time — and says how many items it left out for handling. Items that cannot leave are named, with the reason. An item marked *consult originator* needs a justification and the originator's reference before **Export** is enabled. Every export is recorded. Report packs export to PDF from the Packs and Published tabs.

12. Keys

Where	Key	Does
Home	`G`, `I`, `R`, `A`	Open the Glass, the Ingest Studio, Rules and Monitoring or Admin, as your roles allow
Anywhere	`/`	Search
Anywhere	`?`	The welcome panel, with keys worth knowing
Canvas	Tab, Shift+Tab	Move into and out of the canvas
Canvas	Arrows	Step to the next or previous neighbour; a screen reader hears its name, type and links
Canvas	Ctrl/Cmd+Arrows	Step within the selection; with Shift, through every node
Canvas	Space	Add or remove the focused node from the selection
Canvas	Enter	Expand the focused node, or read a document
Canvas	`\`	The focused node's or the selected link's menu
Canvas	`L`, Shift+`L`	The next or previous link of the focused node
Canvas	`G`	Fold or unfold the focused node's group
Canvas	`F`	Fit the graph to the view
Canvas	Shift+Arrows	Move the selection; with Alt, further
Canvas	Delete	Hide the selected link, or remove the selection from view
Matrix	Arrows, Home, End	Move between cells; with Ctrl, Home and End go to the first and last cell
Matrix	Page Down, Page Up	The next or previous page of rows
Matrix	Enter	Select the row's node or link
Matrix	Space	Add the row's node to the selection, or take it out
Anywhere	Esc	Clear the selection; close a menu, drawer or reader
Forms	Ctrl/Cmd+Enter	Confirm a reason, save a change or a note, ask a question
Side panels	Alt+Up, Alt+Down	Move a panel up or down the column

Every action in the Glass can be reached from the keyboard. Panning, zooming and the lasso are by pointer only, by design: the arrows, Space and `F` do the same work from the keyboard.